


Water valves can be either 2 way or 3 way. Hot water valves are piped normally open to the coil. Chilled water valves are piped normally closed to the coil. On 2 pipe heat/cool applications, the valves are piped as though heating valves.


Piping packages are installed and tested in the Carrier factory to ensure proper operation and leak tightness. They are disconnected at the unions and shipped in the end compartments.

All water coils contain vent and drain plugs as standard. Control valve and all components by factory, unless otherwise indicated. **Value packages must be field insulated if required by specification.**


Steam - Valve Package Components

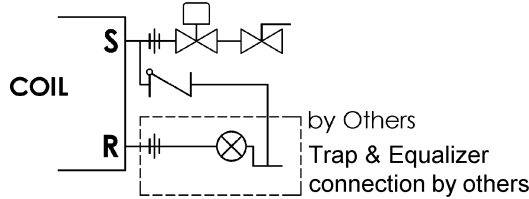










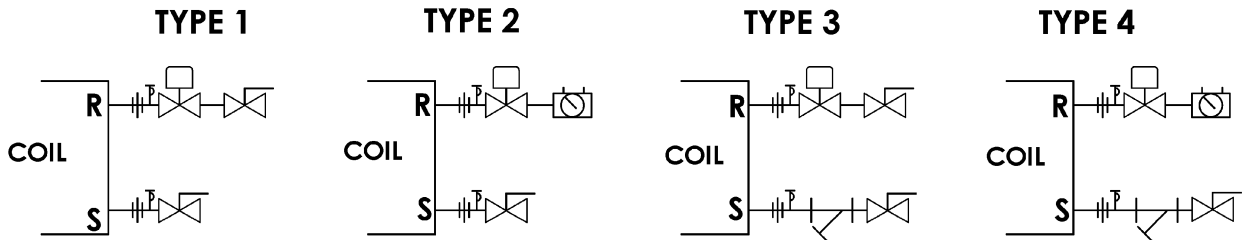
Two Way - Valve Package Components

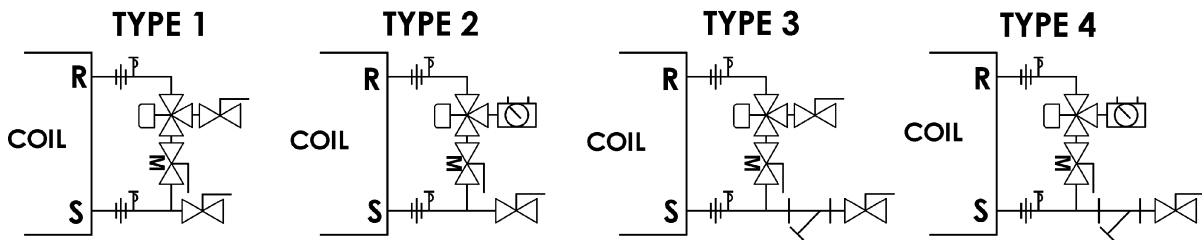

Three Way - Valve Package Components



LEGEND	 BALL VALVE	 STEAM TRAP
	 BALL VALVE w/MEMORY STOP	 PT PORT
	 CHECK VALVE	 UNION
	 CIRCUIT SETTER	 3-WAY CONTROL VALVE
	 WYE STRAINER	 2-WAY CONTROL VALVE

PRODUCT INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

06/14/04

JOB NAME	JOB NUMBER	LOCATION	DRAWING NUMBER
BUYER	BUYER #	REVISION A	40UV-202-9