


50TC

Single Package Rooftop,
Cooling Only, with Optional Electric Heat
Two Stage Cooling Capacity Control
with Puron® (R-410A) Refrigerant
Sizes: 17, 20, 24, 28, 30



Submittal Data

- **PERFORMANCE DATA**
- **CERTIFIED DIMENSION PRINTS**
- **CERTIFIED ROOF CURB
DIMENSION PRINTS**
- **SERVICE OPTION DIMENSION
PRINTS**



Job Data: _____ Location: _____
 Buyer: _____ Buyer P.O.#: _____ Carrier: _____
 Unit Number: _____ Model Number: _____
 Unit Designation: _____
 Performance Data Certified By: _____



Certified to ISO 9001



Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.



DESCRIPTION

50TC units are single-packaged electric cooling only units that are pre-wired and pre-charged with environmentally sound Puron® (R-410A) HFC refrigerant. Electric heat is available as a field-installed accessory.

50TC

STANDARD FEATURES

Base Unit

- Puron (R-410A) HFC refrigerant
- EER's up to 11.0
- IEER's:
 - up to 11.8 with standard motor
 - up to 12.9 with 2 speed/VFD indoor fan motor
- Rated in accordance with AHRI Standard 340/360
- Designed in accordance with Underwriters' Laboratories Standard 1995
- Listed by ETL
- ASHRAE 90.1 energy compliant
- Rated in accordance with AHRI Standard 340/360
- Two-stage cooling capacity control
- Non-corrosive composite sloping design; side or center drain condensate pan. Meets ASHRAE Standard 62
- Standard cooling operating range from 30°F up to 115°F (-1°C up to 46°C).
- Dedicated vertical and horizontal airflow models available as factory option. No special field kits required.
- Two-inch disposable return air filters
- Provisions for thru-the-bottom power entry capability as standard in an environmentally protected area.
- Single point electric connections
- 24-volt control circuit protected with resettable circuit breaker and 75-VA transformer
- Belt drive, constant torque, permanently lubricated evaporator-fan motor
- Blower bearing extended lubrication line on all sizes
- Totally enclosed condenser motors with permanently lubricated bearings
- Low-pressure and high-pressure switch protection

- Full perimeter base rail with built-in rigging adapters and fork truck slots
- New central terminal board facilitating simple safety circuit troubleshooting and simplified control box arrangement.
- High performance belt drive motor with variable pitch pulleys, quick adjust belt system and fan belt protection

Cabinet

- Access panels with easy grip handles
- Innovative, easy starting, no-strip screw feature on unit access panels
- Pre-painted exterior panels and primer-coated interior panels tested to 500 hours salt spray protection
- Fully insulated cabinet

Refrigerant System

- Acutrol™ refrigerant metering system
- Liquid line filter drier on each circuit
- Scroll compressors with internal line-break overload protection
- Copper tube, aluminum fin evaporator coil
- Round Tube/Plate Fin (RTPF) condenser coils on all model sizes or NOVATION™ all aluminum condenser coils available on 17 - 28 sizes.

Standard Warranty

- 5-year compressor parts
- 5-year electric heater parts
- 1-year parts
- 3-year NOVATION™ condenser coil parts

PERFORMANCE DATA

Unit Operating Weight _____ lb

Curb Weight _____ lb

Cooling

Gross Total Capacity: _____ Btuh

at Condenser Air Temperature _____ °F

Gross Sensible Capacity: _____ Btuh

Compressor Power Input: _____ kW

Indoor Entering db _____ °F wb _____ °F

Airflow _____ CFM External Static Pressure _____ in.wg

Indoor Fan Motor Size _____ Hp

Exhaust Fan Motor Size _____ Hp

Heating

Heating Capacity:

Stage 1 _____ Btuh

Stage 2 _____ Btuh

Heating Capacity Total _____ Btuh

Stage 1 _____ kW

Stage 2 _____ kW

Heating Capacity Total _____ kW

ELECTRICAL DATA

Power Supply to Unit _____ Volts _____ Phase _____ Hz

Minimum Circuit Amps _____ Maximum Overcurrent Protection _____

SUBMITTAL DATA

Job Name _____

Architect _____

Engineer _____

Contractor _____

Unit Designation _____

OPTIONS AND ACCESSORIES

FACTORY-INSTALLED OPTIONS (FIOPs)

- Staged Air Volume (SAV) system utilizes a Variable Frequency Drive (VFD) to automatically adjust the indoor fan motor for 2 speed indoor fan motor control. Conforms to ASHRAE 90.1 2010 Standard – section 6.4.3.10.b. Not available with Humidi-MiZer® option.
- Vertical air flow duct configuration models
- Horizontal air flow duct configuration models
- RTU Open protocol controller communicates to LON, MODBUS, BACNET and Johnson N2 protocols.
- CCN Direct Digital Control (DDC) - PremierLink
- Through the base connectors electric conduit/piping
- Standard Economizer with dry bulb sensing and barometric relief
- Standard Economizer with enthalpy sensing and barometric relief
- Ultra Low Leak economizer with maximum leakage rate equal or less than 4.0 cfm/sq. ft. at 1.0 in. w.g. Available on models with Staged Air Volume (SAV) 2 speed indoor fan motor only.
- 2 position motorized outdoor air damper
- 25% Manual outdoor air damper
- Humidi-MiZer adaptive dehumidification system available for sizes 17 – 28. Unit must be equipped with RTPF condenser coils.
- Non-fused disconnect
- Powered 115-volt convenience outlet
- Non-powered 115-volt convenience outlet
- Medium and High static motor options
- Return Air smoke detector
- Supply Air smoke detector
- CO₂ sensor
- Condenser hail guard - louvered style
- Special coating protection for evaporator and condenser coils

OPTIONAL WARRANTIES

- Complete Unit Parts only up to 5 years
 - Complete Unit Parts and Labor up to 5 years
- Many other optional warranties are available. See the *Commercial Start-Up and Optional Extended Warranty Price* price pages for further information.


FIELD INSTALLED ACCESSORIES

- EconoMiSer™ X – Ultra Low Leak electromechanical, gear driven with Honeywell W7220 digital controller. Used with 2 speed Staged Air Volume (SAV) systems only.
- Display Kit for Variable Frequency Drive (VFD), Staged Air Volume System. Allows additional set up and diagnostics of the unit VFD controller. Can be unit mounted or used with any other VFD model as a reusable device.
- EconoMiSer™ IV-electromechanical, gear driven with Belimo actuator (2-10v DC signal) and controller
- EconoMiSer™ 2-compatible with DDC controls; gear driven with Belimo actuator (4-20mA) signal and no controller
- Electric heater(s)
- Single point kit
- Power exhaust - centrifugal fan design
- Two-position motorized outdoor air damper
- 25% Manual outdoor air damper
- Roofcurb - 14 inch (356mm) tall
- Roofcurb - 24 inch (610mm) tall
- Adapter Curb (for sizes 17-28 only) - Adapts to Carrier DP/DR, TJ, HJ, TM, PG roofcurbs
- Condenser hail guard - louvered style
- Phase monitor (loss of phase/phase reversal)
- Winter start kit, down to 25°F (-4°C)
- Low ambient head pressure controller, down to -20°F (-29°C)
- Time Guard II compressor anti-cycle protection
- Four inch filter tracks
- Return Air smoke detector
- Supply Air smoke detector
- Thermostats and Sensors

Economizer Sensors

- Single Dry bulb control
- Differential Dry bulb control
- Single enthalpy control
- Differential enthalpy control
- CO₂ - wall mounted
- CO₂ - duct mounted
- CO₂ - unit mounted

CERTIFIED DIMENSION 50TC-*17, 20

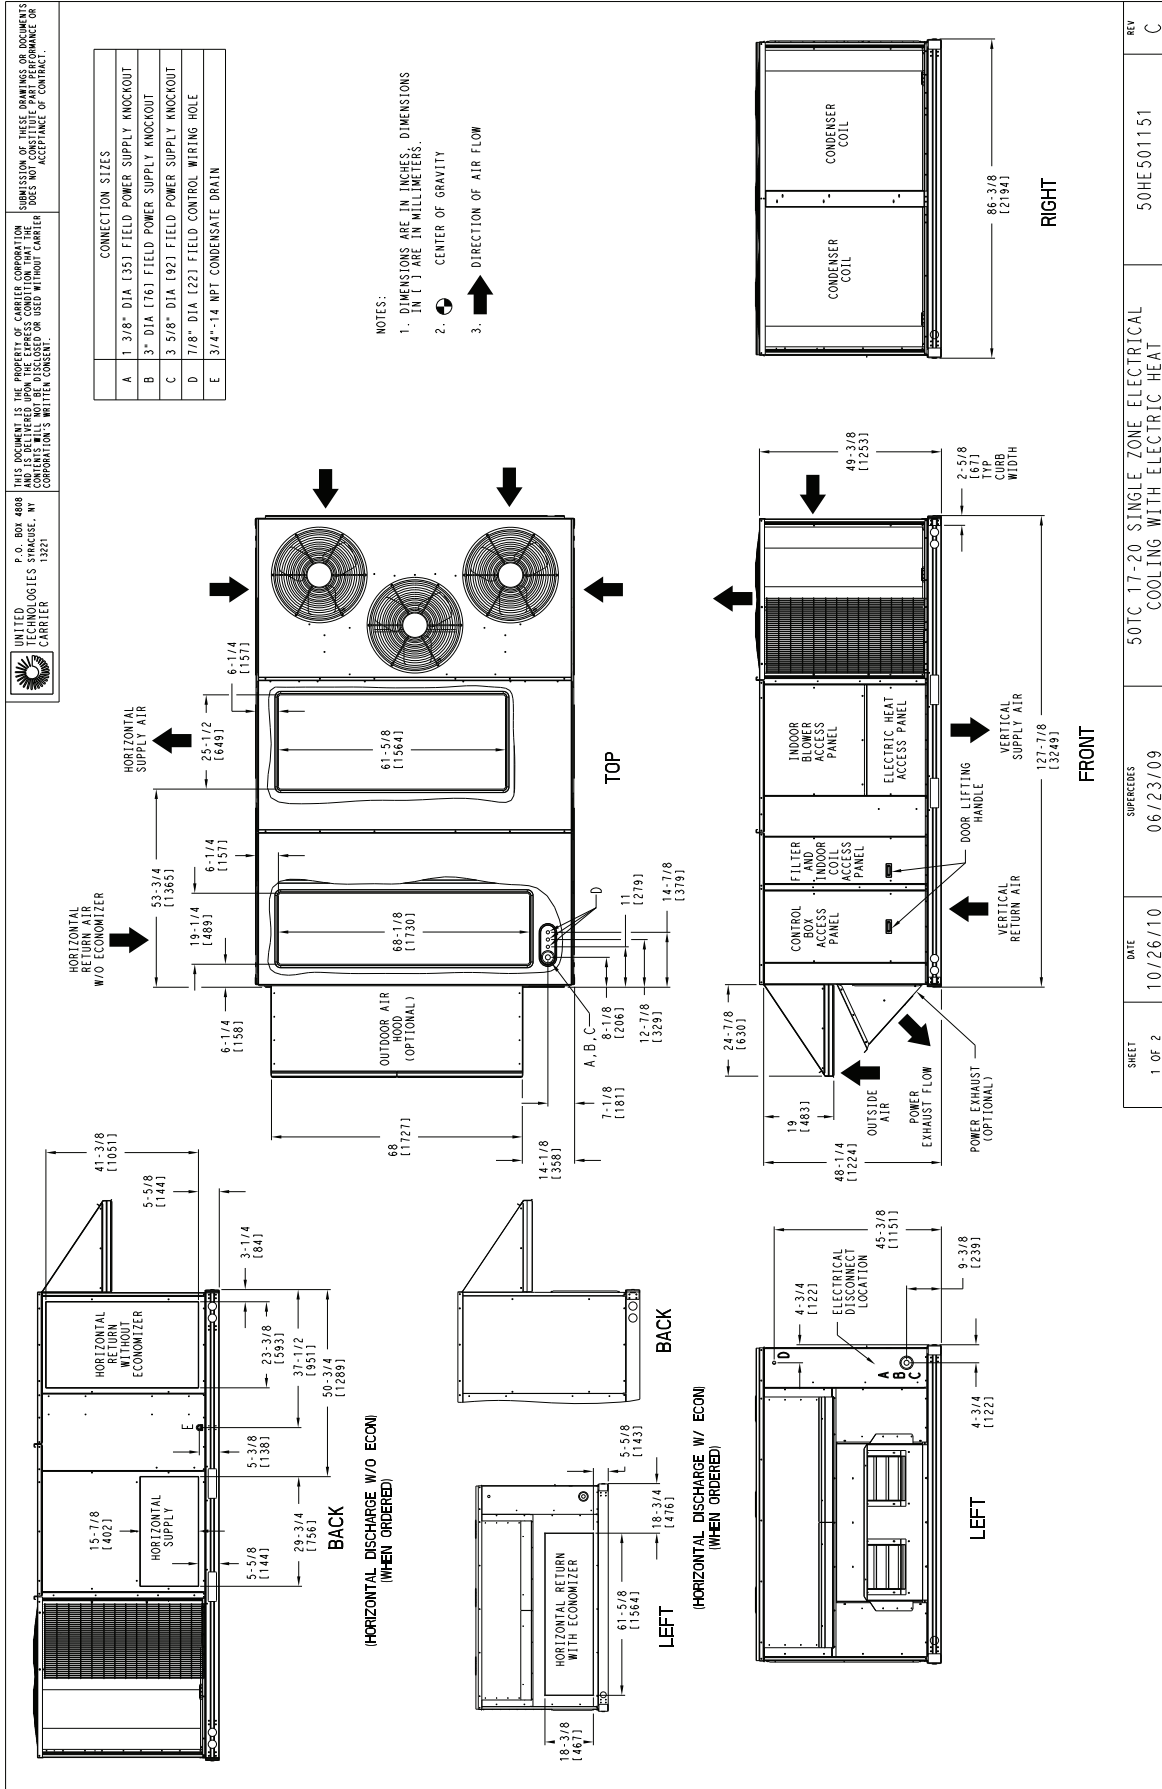

SHEET	DATE	SUPERSEDES	REV
1 OF 2	10/26/10	06/23/09	C
50TC 17-20 SINGLE ZONE ELECTRICAL COOLING WITH ELECTRIC HEAT			50HE501151

50TC

C101237


CERTIFIED DIMENSION 50TC-17, 20

UNITED TECHNOLOGIES SYRACUSE, NY
 P.O. BOX 4888 13221
 CARRIER
 THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION AND IS NOT TO BE REPRODUCED OR USED WITHOUT CARRIER CORPORATION'S WRITTEN CONSENT.
 SUBMISSION OF THESE DRAWINGS OR DOCUMENTS DOES NOT CONSTITUTE A PERFORMANCE OR ACCEPTANCE OF CONTRACT.

UNIT	STD UNIT WEIGHT		CORNER WEIGHT (A)		CORNER WEIGHT (B)		CORNER WEIGHT (C)		CORNER WEIGHT (D)		C.G.								
	LBS	KG	LBS	KG	LBS	KG	LBS	KG	LBS	KG	X	Y	Z						
50TC17	1697	771	403	183	412	187	446	203	436	198	44	37.4	[1137]	6.4	37.4	[11645]	16	17.2	[419]
50TC20	1712	778	407	185	416	189	450	204	440	200	44	37.4	[1137]	6.4	37.4	[11645]	16	17.2	[419]
50TC17	1808	822	415	189	492	224	488	222	412	187	42	29.32	[1090]	6.9	7.4	[1759]	16	17.2	[419]
50TC20	1823	829	419	190	496	226	493	224	415	189	42	29.32	[1090]	6.9	7.4	[1759]	16	17.2	[419]

* STANDARD UNIT WEIGHT IS WITHOUT ELECTRIC HEAT AND WITHOUT PACKAGING.
 FOR OTHER OPTIONS AND ACCESSORIES, REFER TO THE PRODUCT DATA CATALOG.

RTPE - ROUND TUBE PLATE WITH COPPER/ALUMI
 MCHX - NOVATION (ALUM/ALUM)

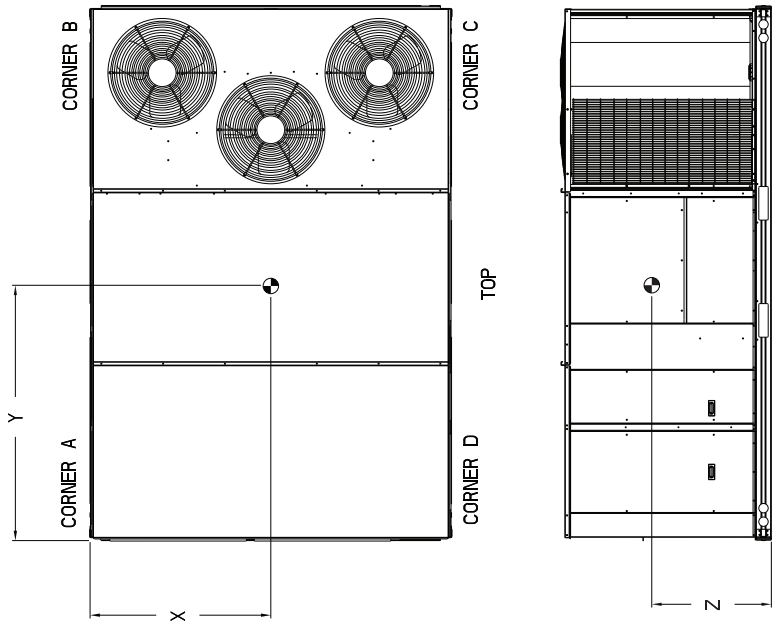


SHEET	DATE	SUPERCEDES	REV
2 OF 2	10/26/10	06/23/09	C

50TC 17-20 SINGLE ZONE ELECTRICAL
 COOLING WITH ELECTRIC HEAT

50HE501151

C101238

CERTIFIED DIMENSION 50TC-*24, 28

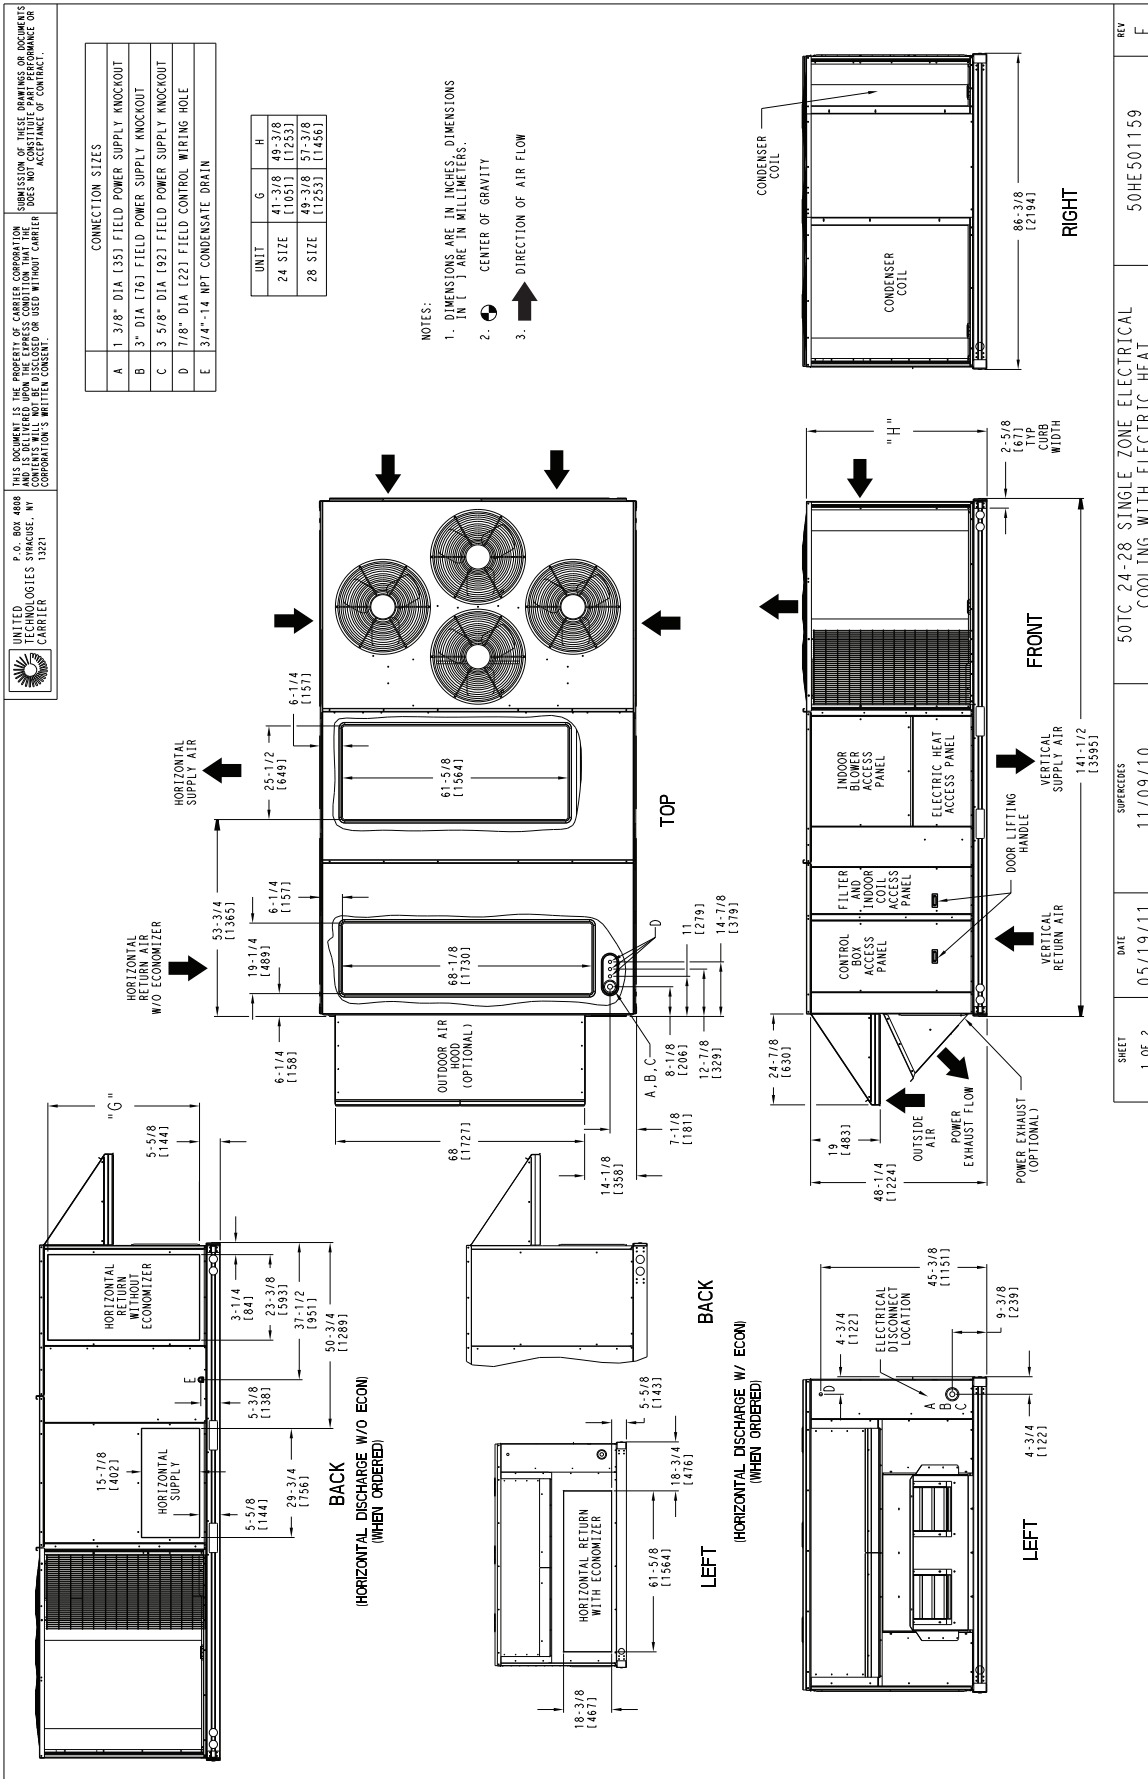

50TC

SHEET	DATE	SUPERSEDES	REV
1 OF 2	05/19/11	11/09/10	E

C11249


CERTIFIED DIMENSION 50TC-*24, 28

UNITED TECHNOLOGIES SYRACUSE, NY
 P.O. BOX 4888
 13221
 THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION. IT IS TO BE USED ONLY FOR THE PROJECT AND FOR WHICH IT WAS SUBMITTED. IT IS NOT TO BE REPRODUCED OR USED WITHOUT CARRIER CORPORATION'S WRITTEN CONSENT.
 SUBMISSION OF THESE DRAWINGS OR DOCUMENTS DOES NOT CONSTITUTE PART PERFORMANCE OR ACCEPTANCE OF CONTRACT.

UNIT	STD. UNIT WEIGHT *		CORNER WEIGHT (A)		CORNER WEIGHT (B)		CORNER WEIGHT (C)		CORNER WEIGHT (D)		C. G.							
	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	X	Y	Z					
50TC24	1862	846	359	163	506	230	583	265	414	188	46	117/8	82	7/8	12105]	16	1/2	[419]
50TC28	1991	905	384	174	541	246	624	284	443	201	46	11/8	82	7/8	12105]	19	[483]	
50TC24	1973	897	532	242	522	237	456	207	464	211	40	5/32	11020]	70	[11781]	16	1/2	[419]
50TC28	2098	954	545	248	539	245	504	229	510	232	41	21/32	11058]	70	1/4	11784]	19	[483]


RTYPE - ROUND TUBE PLATE FIN (COPPER/ALUM)
 MCHX - NOVATION (ALUM/ALUM)

* STANDARD UNIT WEIGHT IS WITHOUT ELECTRIC HEAT AND WITHOUT PACKAGING.
 FOR OTHER OPTIONS AND ACCESSORIES, REFER TO THE PRODUCT DATA CATALOG.

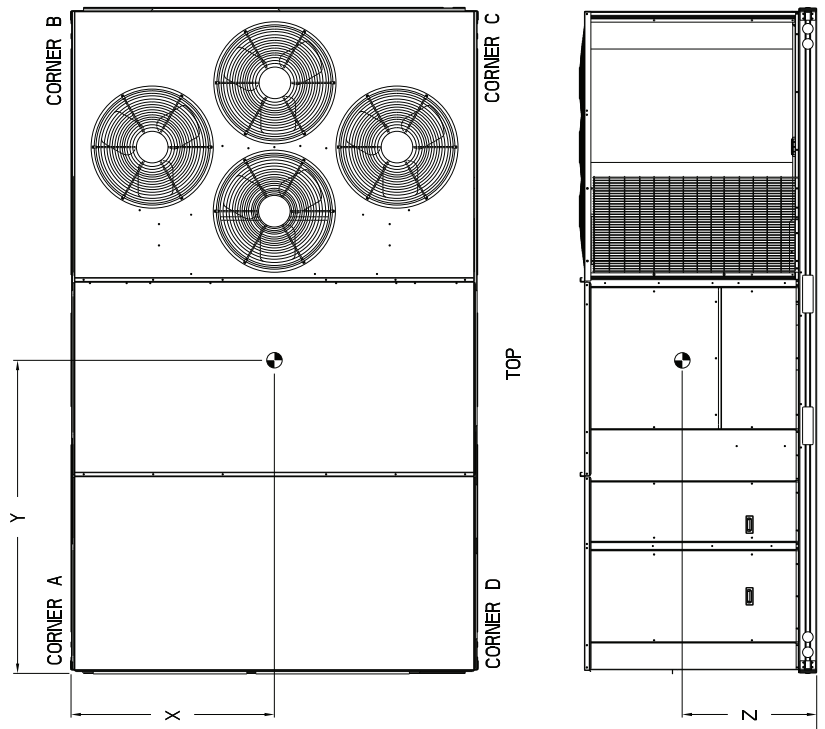

SHEET 2 OF 2	DATE 05/19/11	SUPERSEDES 11/09/10	50TC 24-28 SINGLE ZONE ELECTRICAL COOLING WITH ELECTRIC HEAT	50HE501159	REV E
-----------------	------------------	------------------------	---	------------	----------

CERTIFIED DIMENSION 50TC-*30

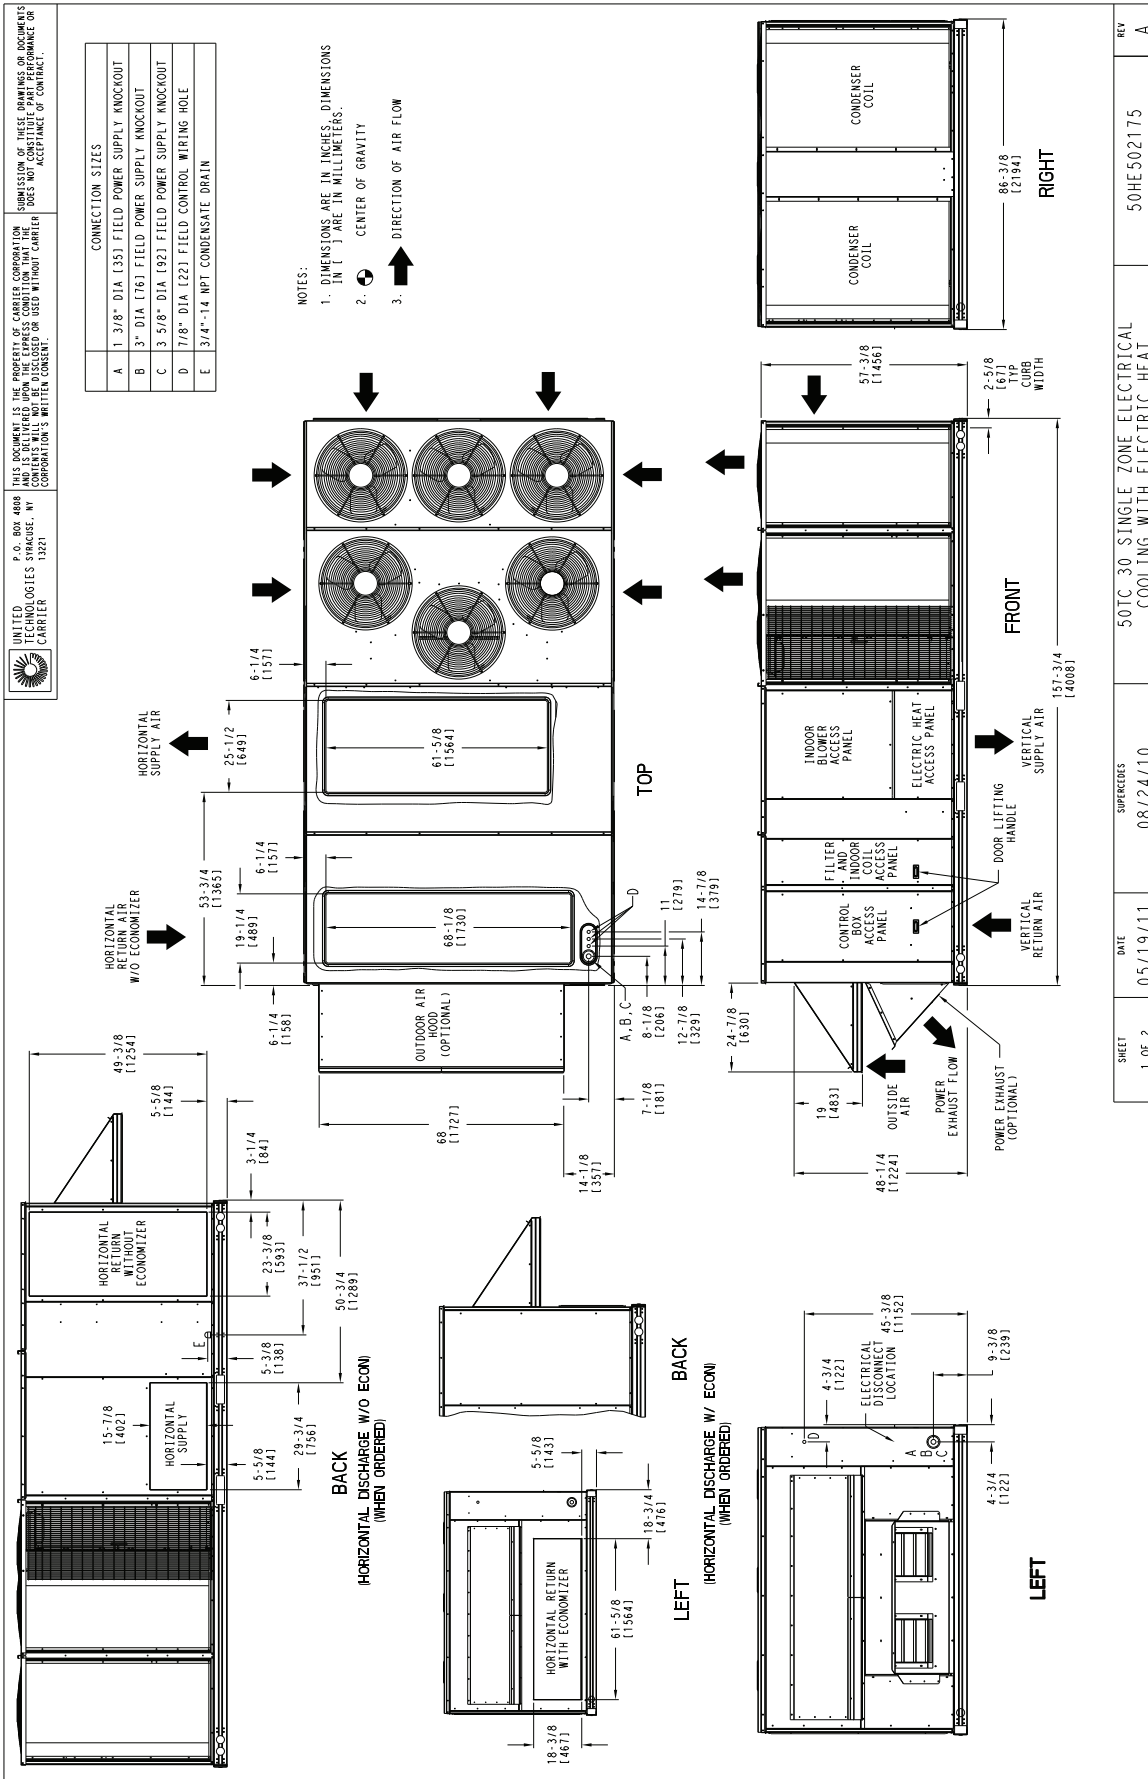

SHEET	DATE	SUPERSEDES	REV
1 OF 2	05/19/11	08/24/10	A

50TC 30 SINGLE ZONE ELECTRICAL COOLING WITH ELECTRIC HEAT

50HE502175

C11245





50TC

CERTIFIED DIMENSION 50TC-*30

UNIT	CORNER WEIGHT (A)		CORNER WEIGHT (B)		CORNER WEIGHT (C)		CORNER WEIGHT (D)		C.G.				
	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	X	Y	Z		
50TC30	2513	1142	664	302	566	257	591	269	693	315	44 (1118)	72 1/2 (1842)	19 (483)

* STANDARD UNIT WEIGHT IS WITHOUT ELECTRIC HEAT AND WITHOUT PACKAGING.
 FOR OTHER OPTIONS AND ACCESSORIES, REFER TO THE PRODUCT DATA CATALOG.

UNITED STATES CARRIER
 P.O. Box 4888
 LOGAN, UT 84301
 THIS DOCUMENT IS THE PROPERTY OF CARLISLE CORPORATION
 AND ITS CONTENTS ARE NOT TO BE DISCLOSED OR USED WITHOUT CARRIER
 CORPORATION'S WRITTEN CONSENT.
 SUBMISSION OF THESE DRAWINGS OR DOCUMENTS
 DOES NOT CONSTITUTE AN ACCEPTANCE OF CONTRACT.

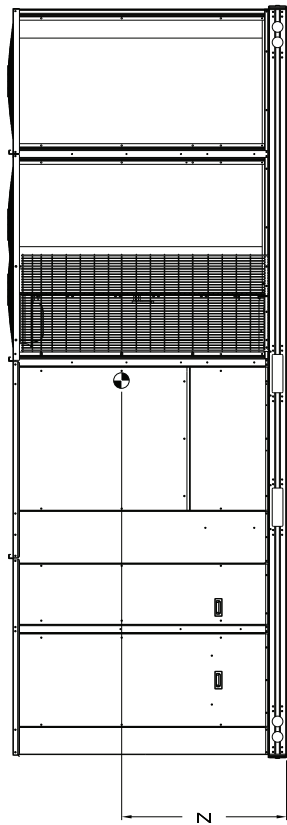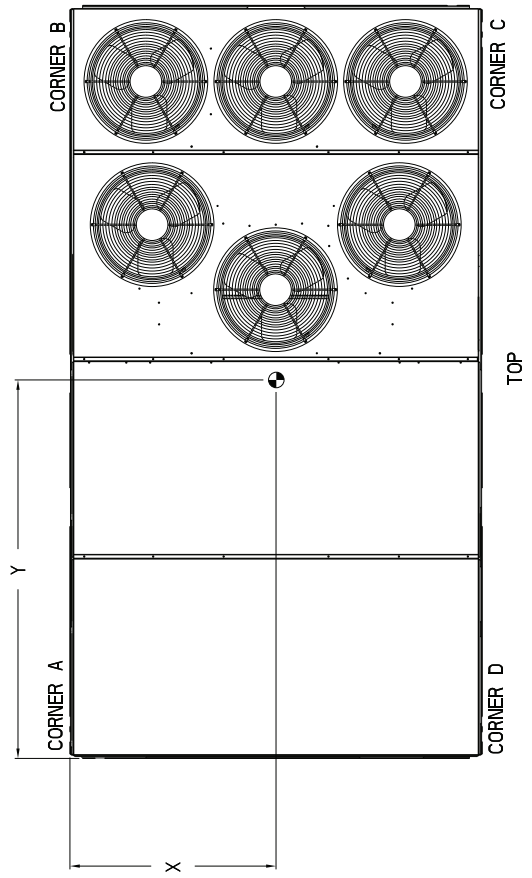


SHEET 2 OF 2	DATE 05/19/11	SUPERCHG 08/24/10	50TC 30 SINGLE ZONE ELECTRICAL COOLING WITH ELECTRIC HEAT	50HE502175	REV A
-----------------	------------------	----------------------	--	------------	----------

C11246

ROOF CURB DETAILS - 17 & 20 SIZE UNITS



UNIT SIZE	"A"	ROOF CURB ACCESSORY
17,20	1'-2" [356.0] 2'-0" [610.0]	CRRFCURB045A00 CRRFCURB046A00

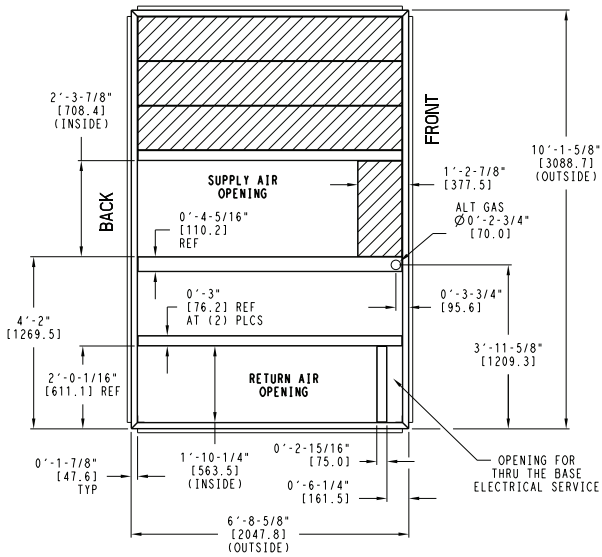






NOTES:

- 1 ROOF CURB ACCESSORY IS SHIPPED UNASSEMBLED.
- 2 DIMENSIONS IN [] ARE IN MILLIMETERS.
- 3 ROOF CURB GALVANIZED STEEL.
- 4 ATTACH DUCTWORK TO CURB (FLANGES ON DUCT REST ON CURB)
- 5 SERVICE CLEARANCE 4 FT ON EACH SIDE

➔ DIRECTION OF AIR FLOW



MAX CURB LEVELING TOLERANCES

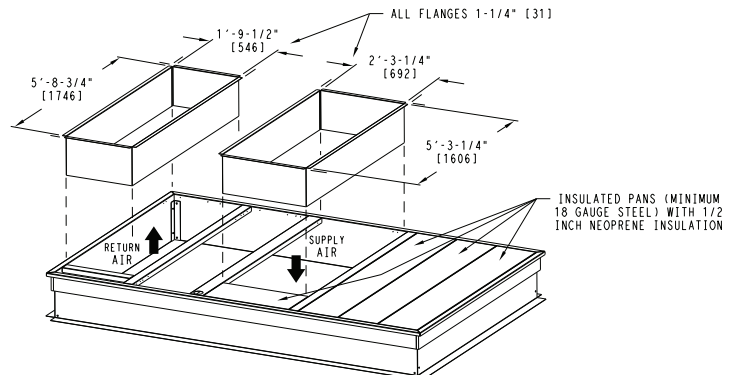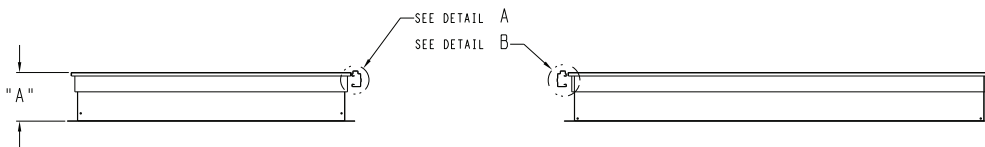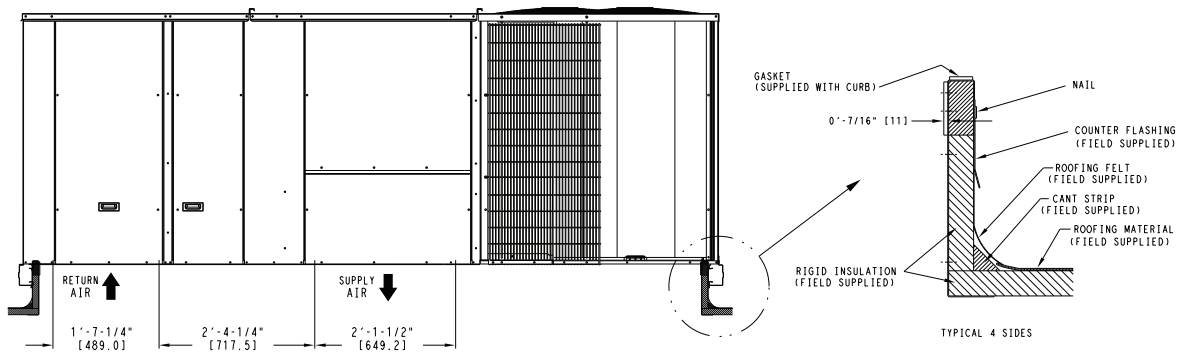


50TC

C09139A

ROOF CURB DETAILS - 24 & 28 SIZE UNITS



UNIT SIZE	"A"	ROOF CURB ACCESSORY
24, 28	1'-2" [356.0]	CRRFCURB047A00
	2'-0" [610.0]	CRRFCURB048A00

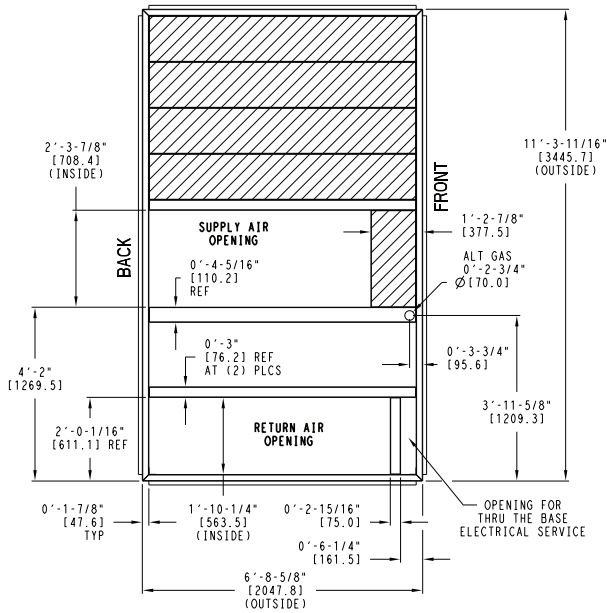







NOTES:

- 1 ROOF CURB ACCESSORY IS SHIPPED UNASSEMBLED.
- 2 DIMENSIONS IN [] ARE IN MILLIMETERS.
- 3 ROOF CURB GALVANIZED STEEL.
- 4 ATTACH DUCTWORK TO CURB (FLANGES ON DUCT REST ON CURB)
- 5 SERVICE CLEARANCE 4 FT ON EACH SIDE

➔ DIRECTION OF AIR FLOW




MAX CURB LEVELING TOLERANCES

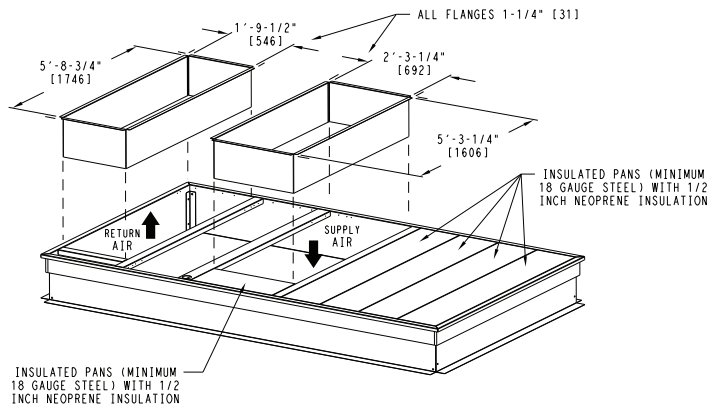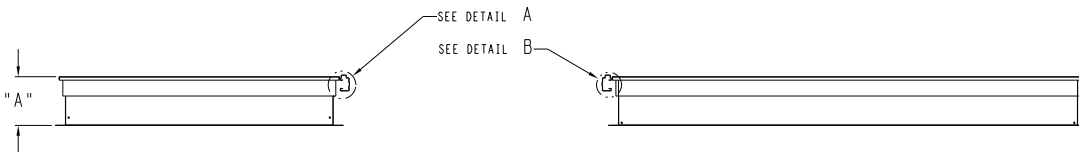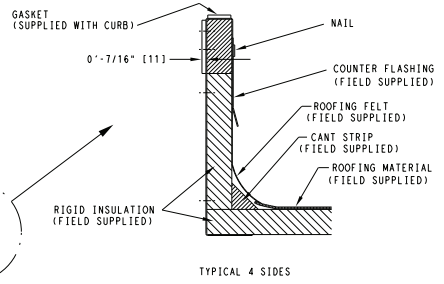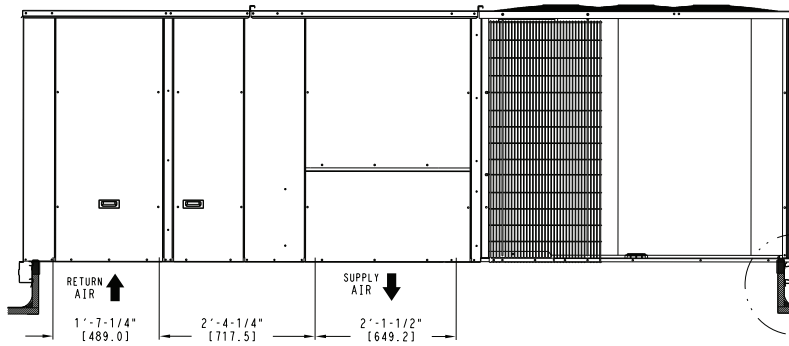





50TC

ROOF CURB DETAILS - 30 SIZE UNIT

UNIT SIZE	"A"	ROOF CURB ACCESSORY
30	1'-2" [356.0] 2'-0" [610.0]	CRRFCURB049A00 CRRFCURB050A00

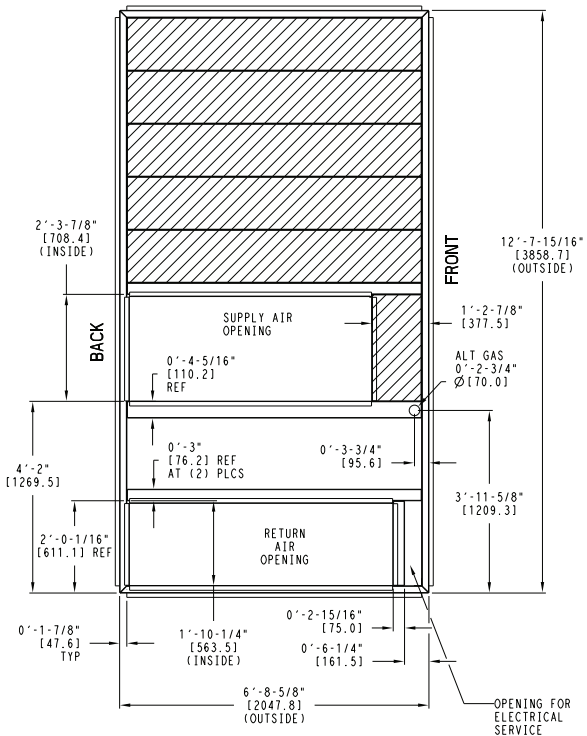

- NOTES:
- 1 ROOF CURB ACCESSORY IS SHIPPED UNASSEMBLED.
 - 2 BOLT HEADS TO BE ON INSIDE OF FLANGE. CLEARANCE IS [11] 0-0-7/16" TYP ALL CORNERS.
 - 3 DIMENSIONS IN [] ARE IN MILLIMETERS.
 - 4 ROOF CURB GALVANIZED STEEL.
 - 5 ATTACH DUCTWORK TO CURB (FLANGES ON DUCT REST ON CURB)
 - 6 SERVICE CLEARANCE 4 FT ON EACH SIDE
- ➔ DIRECTION OF AIR FLOW

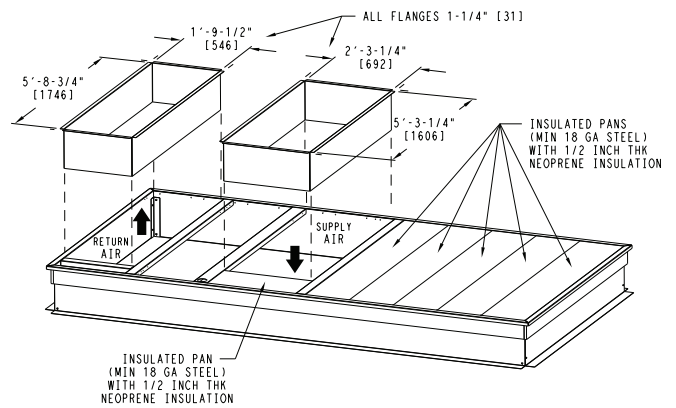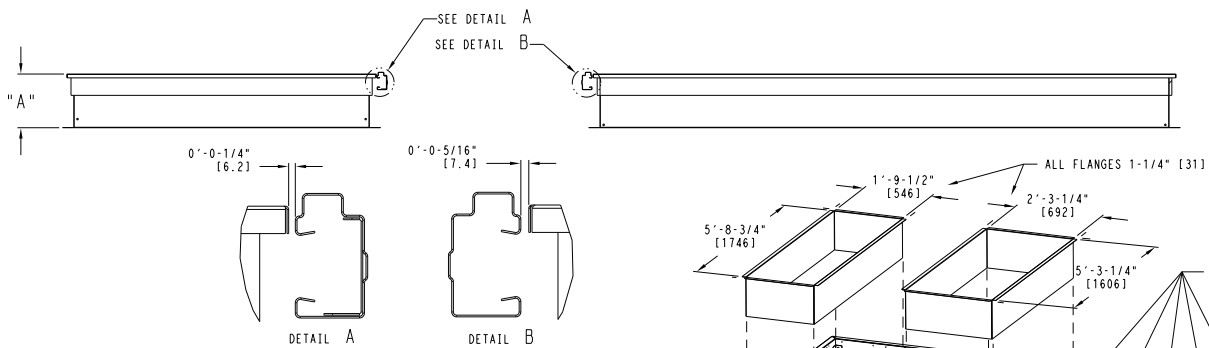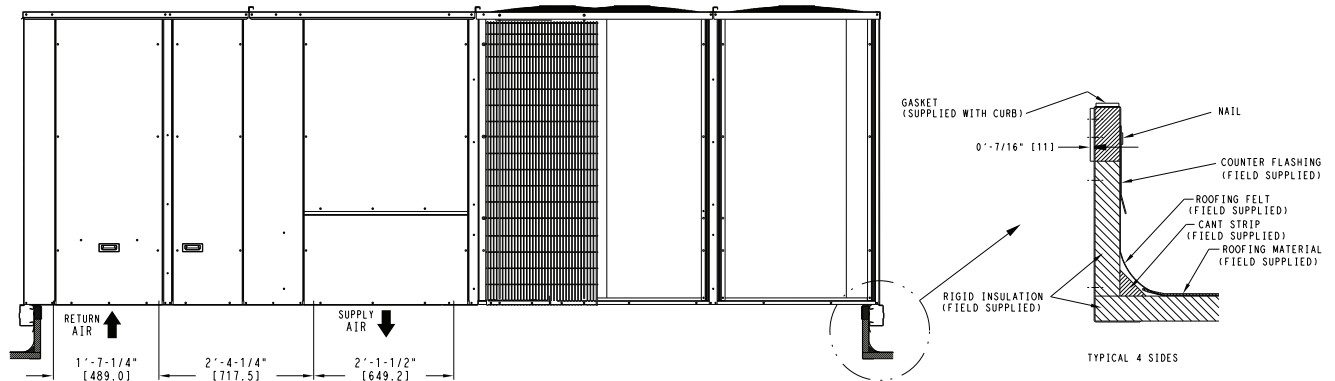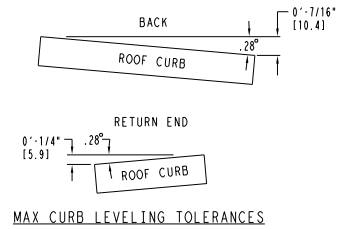

C11251

50TC

