

FE4A, FE5A Infinity™ Series
Communicating Variable-Speed Fan Coil
Puron® Refrigerant
Sizes 002 thru 006



Turn to the Experts.™

Product Data

PREMIUM ENVIRONMENTALLY-SOUND FAN COIL



The latest in technology makes the FE4A and FE5A fan coil models the most advanced air handlers available. With attention to quiet, efficient, and comfortable operation, Carrier has developed a new benchmark for homeowner comfort and ease of installation.

The FE4A and FE5A utilize the Infinity™ Control as a required accessory to enable state of the art smart-diagnostics capability. This enables faster troubleshooting, providing ease of service and repair. The FE4A and FE5A also provide a 4-wire hook up with matching outdoor unit and the Infinity™ Control. This makes installation simpler and a lot quicker than with conventional fan coils. The FE4A and FE5A have advanced technology that allows the fan coil to self-configure with a matching outdoor unit and the Infinity™ Control, cutting down on installation time. ArmorCoat™ provides a tin plating of the indoor coil's copper hairpins. This creates a barrier between the corrosion-causing elements and the coil.

The FE4A and FE5A feature Puron® refrigerant, the chlorine-free alternate that is the future for the residential heating and cooling industry. The FE4A and FE5A using Puron® refrigerant maximize performance for environmentally sound systems. In addition to environmental safety, these systems are 30 to 40% more efficient than standard heating and cooling systems, thereby combining excellence in efficiency and environmental safety.

The FE4A and FE5A provide these benefits due to Carrier's command of Electronically Commutating Motor (ECM) technology. These motors are extremely efficient at all speeds, and enable the FE4A and FE5A to operate at the correct speed to deliver airflow precisely, ensuring proper performance across a wide range of duct static pressures. This adaptive efficiency also makes installation quality easier to achieve for today's demanding homeowner.

Carrier's command of ECM technology may be most evident in the comfort advantages that an ECM can deliver. For true comfort, the homeowner can achieve command of both temperature and humidity in cooling and heating modes.

Another feature which sets the FE4A and FE5A apart is the factory-installed TXV, which enhances efficiency and provides compressor-protecting operation at all recommended conditions. Grooved copper tubing, louvered aluminum fins, and the large face areas of the FE4A and FE5A refrigerant coils also provide superior efficiency, for high SEER and HSPF performance.

Carrier leads the way in condensate control, a hallmark of these multipoise fan coils. All of these featured components are protected within a rugged, pre-painted metal cabinet lined with super-thick, high-density insulation. For neat, high quality installations, the unit exterior features sweat refrigerant connections for simple leak free performance, and multiple electrical entry for both high and low voltage service.

For superior technology and unmatched comfort, the environmentally sound and efficient FE4A and FE5A fan coils can't be beat.

FEATURES

Smart Diagnostics

- Self configuring (ease of installation)
- Easier troubleshooting, providing faster service and repair

Environmentally-Sound Refrigerant Technology

- Puron® refrigerant the chlorine-free non-ozone depleting refrigerant
- Thermostatic Expansion Valve (TXV) designed to maximize performance with Puron® refrigerant

Energy Efficient Operation

- Electronically Commutated Motor (ECM) operates efficiently at all speeds
- Maximizes efficiency of heating and cooling systems
- Ultra-low power consumption during fan only operation

Comfort Control

- Warm, comfortable heating air temperatures
- Unmatched humidity control

Airflow and Sound Technology

- Logarithmic spiral blower housings for high blower efficiency and quiet operation
- Diffuser air discharge section for high airflow efficiency and quiet, smooth operation
- High duct static capability
- Unique cabinet design that meets new stringent regulations for air leakage. Meets requirements of a 2% cabinet leakage rate when tested at 1.0 in wc of static pressure.

Condensate Control and Disposal Technology

- Minimal standing water - less microbial growth for improved IAQ and reduced condensate line clogging and related condensate leakage
- Condensate fittings relocated away from turbulent airflow patterns at the blower entrance for improved condensate control performance
- Overflow feature for slope coil units allows condensate to exit the unit without damage to product under clogged primary and secondary line conditions
- Tested for condensate disposal at conditions much more severe than those required by ARI
- Primary and secondary drain connections to comply with HUD
- All pans constructed of an injection molded glass-filled polycarbonate engineered resin material, with brass drain connections
- High density, super thick cabinetry insulation with vapor barrier
- Pre-painted galvanized sheet metal cabinet

Heat Transfer Technology

- Grooved copper tubing
- Lanced sine wave aluminum fins
- Discreet refined counterflow refrigerant circuitry
- Bi-flow hard-shutoff TXV metering device
- ArmorCoat™ coil protection available

Quality Assisting, Ease of Installation and Service Features

- Easy 4 wire hook up: convenient and reduces installation time.
- FE4A unit is multipoise
- FE5A unit is upflow/downflow only (single drain pan).
- Provision made for suspending from roof or ceiling joints
- Modular cabinet on sizes 003 through 006
- Sweat connections for leak free service
- Multiple electrical entry for application flexibility (high and low voltage)
- Low voltage terminal strip, to safely hold connections within the cabinet
- Inspection plate on A-coil models for quick coil cleanliness inspection
- Cabinet construction features innovations designed to prevent cabinet sweating

Controls and Electrical Features

- Easy plug connection provided for quick installation of accessory heater packages
- 40VA 208/230v transformer
- Replaceable 3-amp blade-type auto fuse protects against transformer secondary short

Filter Features

- Factory supplied filter
- Cleanable polyester filter media
- Filter “springs” out for easy access - no tools required
- Newly improved filter rack area - filter door insulation added for an improved air seal

MODEL NUMBER NOMENCLATURE


| 1 | 2 | 3 | 4 | 5 | 6 | 7-9 | 10-12 |
|--------------|---|---|----------|---------------------------|---------------------------------|---|----------------------------------|
| F | E | 4 | A | N | B | 002 | 000 |
| Product | Type | Position | Series | Electrical | Cabinet/ Insulation | Capacity | Heating Size |
| F = Fan Coil | E = Infinity™, VS Puron® Refrigerant | 4 = Multipoise 5 = Upflow/ Downflow | A | N = 208/230v, 1ph-60Hz | B = Modular F = Single piece | 002 = 18-36,000 003 = 24-42,000 004 = 24-42,000 005 = 30-48,000 006 = 36-60,000 | T00= ArmorCoat™ 000 = No Heat |



CERTIFICATION APPLIES ONLY WHEN THE COMPLETE SYSTEM IS LISTED WITH ARI



FE4A / FE5A

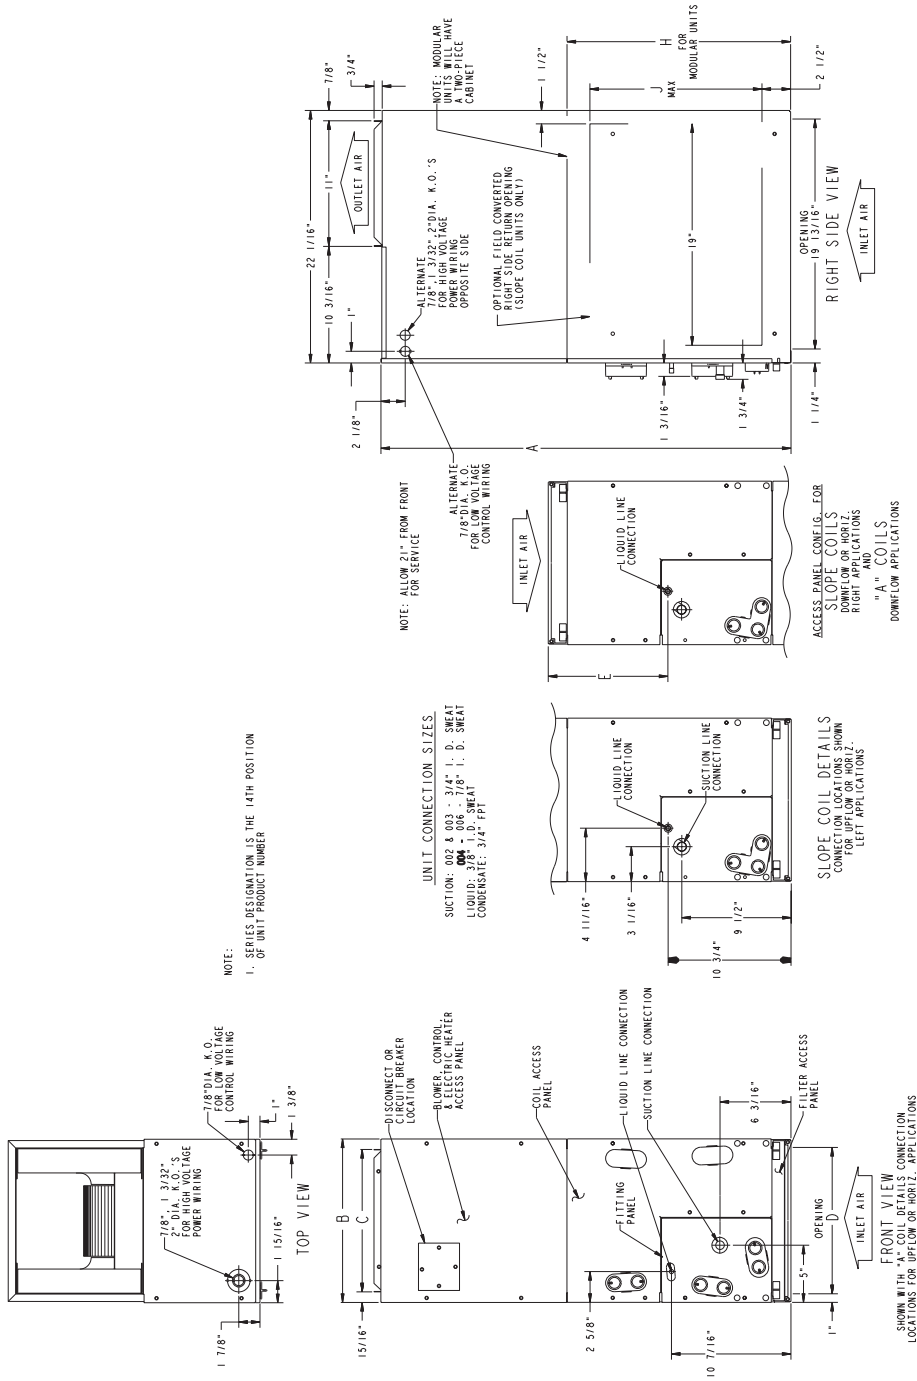


DIMENSIONS

| UNIT | SIZE | A | | B | | C | | D | | E | | H* | |
|------|------|----------|------|----------|-----|--------|-----|----------|-----|---------|-----|---------|-----|
| | | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm |
| FE4A | 002 | 42-11/16 | 1084 | 17-5/8 | 448 | 15-3/4 | 400 | 15-5/8 | 397 | 10-3/4 | 273 | — | — |
| FE4A | 003 | 53-7/16 | 1357 | 21-1/8 | 537 | 19-1/4 | 489 | 19-1/8 | 486 | 19-3/16 | 487 | — | — |
| FE4A | 003* | 53-7/16 | 1357 | 21-1/8 | 537 | 19-1/4 | 489 | 19-1/8 | 486 | 19-3/16 | 487 | 28-5/16 | 719 |
| FE4A | 005 | 53-7/16 | 1357 | 21-1/8 | 537 | 19-1/4 | 489 | 19-1/8 | 486 | 19-1/2 | 495 | — | — |
| FE4A | 005* | 53-7/16 | 1357 | 21-1/8 | 537 | 19-1/4 | 489 | 19-1/8 | 486 | 19-1/2 | 495 | 28-5/16 | 719 |
| FE4A | 006* | 59-3/16 | 1503 | 24-11/16 | 627 | 22-3/4 | 578 | 22-11/16 | 576 | 25-1/4 | 641 | 34-1/16 | 865 |
| FE5A | 004* | 59-3/16 | 1503 | 24-11/16 | 627 | 22-3/4 | 578 | 22-11/16 | 576 | 25-1/4 | 641 | 34-1/16 | 865 |

* Modular Cabinet

SLOPE COIL

NOTES:
1. CONDENSATE PAN DRAIN CAPS NOT SHOWN FOR CLARITY.

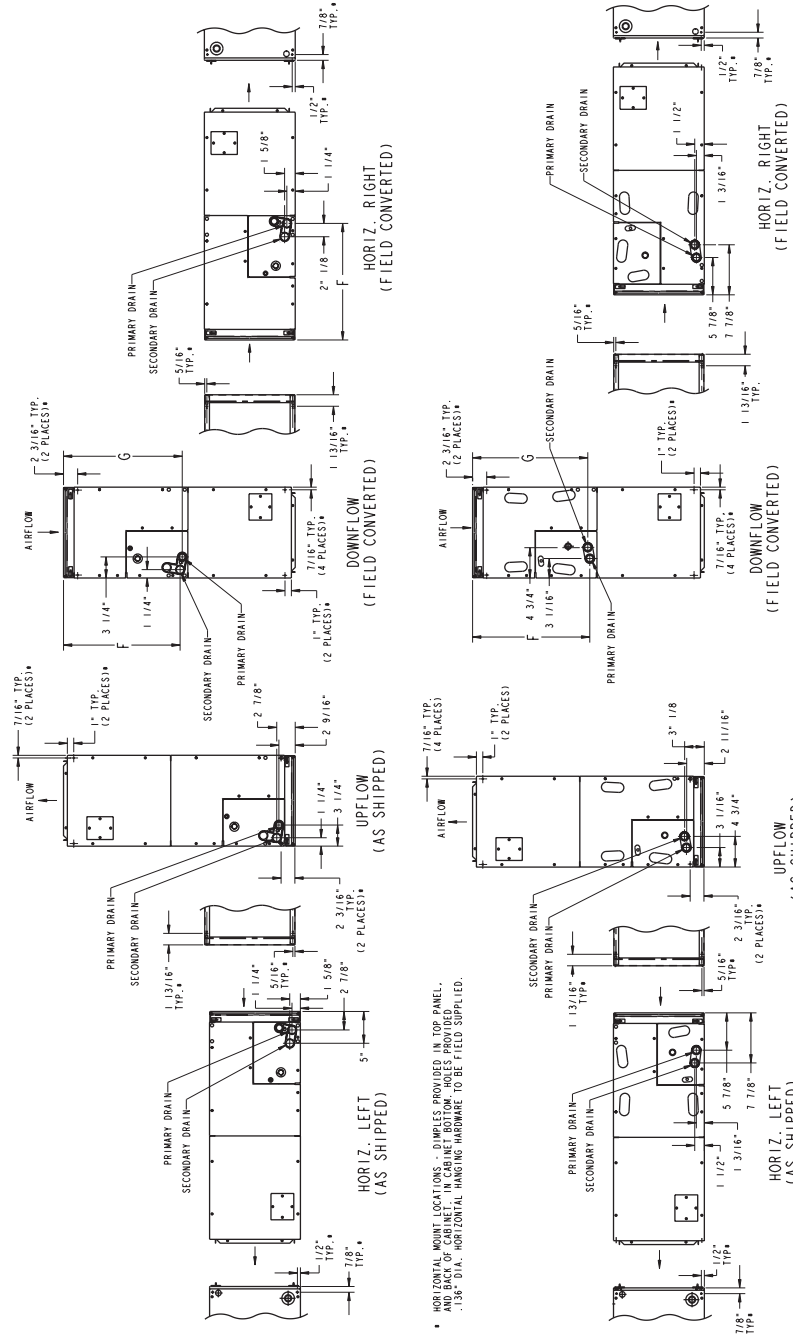

* HORIZONTAL MOUNT LOCATIONS - DIMS. PROVIDED IN TOP PANEL AND BACK OF CABINET. IN CABINET BOTTOM HOLES PROVIDED. .136" DIA. HORIZONTAL HANGING HARDWARE TO BE FIELD SUPPLIED.

DIMENSIONS

| UNIT | SIZE | F | | G | | COIL CONFIGURATION | | SHIPPING WEIGHT |
|------|------|----------|-----|----------|-----|--------------------|-----|-----------------|
| | | in | mm | in | mm | Slope | "A" | |
| FE4A | 002 | 18-9/16 | 472 | 18-1/4 | 464 | — | Yes | 135 / 61 |
| FE4A | 003 | 26-15/16 | 684 | 27-1/2 | 699 | Yes | — | 150 / 68 |
| FE4A | 003* | 26-15/16 | 684 | 27-1/2 | 699 | Yes | — | 150 / 68 |
| FE4A | 005 | 27-1/4 | 692 | 26-15/16 | 684 | — | Yes | 172 / 78 |
| FE4A | 005* | 27-1/4 | 692 | 26-15/16 | 684 | — | Yes | 172 / 78 |
| FE4A | 006* | 32-15/16 | 837 | 32-5/8 | 829 | — | Yes | 207 / 94 |
| FE5A | 004* | 32-15/16 | 837 | 32-5/8 | 829 | — | Yes | 200 / 91 |

* Modular Cabinet

FE4A / FE5A

PHYSICAL DATA

| ODS CATALOG ORDERING NO. | FIELD-INSTALLED HEAT (kW) | NOMINAL COOLING CAPACITY (BTUH) | DIMENSIONS | | | SHIPPING WEIGHT lb / kg |
|----------------------------------|---------------------------------|---------------------------------|----------------------|---------------------|--------------------|-------------------------|
| | | | Height | Width | Depth | |
| FE4ANF002000 FE4ANF002T00 | 5, 8, 9, 10, 15, 20 | 18,000 to 36,000 | 42-11/16" 1084 mm | 17-5/8" 448 mm | 22-1/16" 560 mm | 135 lb 61 kg |
| FE4ANF003000 FE4AN(B,F)003T00 | 5, 8, 9, 10, 15, 18, 20 | 24,000 to 42,000 | 53-7/16" 1357 mm | 21-1/8" 537 mm | 22-1/16" 560 mm | 150 lb 68 kg |
| FE4ANF005000 FE4AN(B,F)005T00 | 5, 8, 9, 10, 15, 18, 20, 24, 30 | 30,000 to 48,000 | 53-7/16" 1357 mm | 21-1/8" 537 mm | 22-1/16" 560 mm | 172 lb 78 kg |
| FE4ANB006000 FE4ANB006T00 | 8, 9, 10, 15, 18, 20, 24, 30 | 36,000 to 60,000 | 59-3/16" 1503 mm | 24-11/16" 627 mm | 22-1/16" 560 mm | 207 lb 94 kg |
| FE5ANB004T00 | 5, 8, 9, 10, 15, 18, 20 | 24,000 to 42,000 | 59-3/16" 1503 mm | 24-11/16" 627 mm | 22-1/16" 560 mm | 200 lb 91 kg |

FE4A / FE5A

SPECIFICATIONS

| MODEL | FE4A | | | | FE5A |
|--------------------------------------|---------------------------------|-------------------|-------------------|-------------------|-------------------|
| SIZE | 002 | 003 | 005 | 006 | 004 |
| COIL | | | | | |
| Refrigerant Metering Device | Puron® Refrigerant (R-410A) TXV | | | | |
| TXV Size | 2 Ton | 3 Ton | 4 Ton | 4 Ton | 3 Ton |
| Configuration | A | Slope | A | A | A |
| Rows—Fins/In. | 3 / 14.5 | | | | |
| Face Area (Sq Ft) | 3.46 | 3.46 | 5.93 | 7.42 | 7.42 |
| MATCHES OUTDOOR UNIT SIZES | | | | | |
| Nominal Cooling Tons | 1.5, 2, 2.5, 3 | 2, 2.5, 3, 3.5 | 2.5, 3, 3.5, 4 | 3, 3.5, 4, 5 | 2, 2.5, 3, 3.5 |
| FAN | | | | | |
| Air Discharge | Upflow, Downflow, Horizontal | | | | Upflow, Downflow |
| CFM/Ton (Nominal Clg/Htg) | 350+ | | | | |
| Motor HP (ECM) | 1/2 | 1/2 | 1/2 | 3/4 | 3/4 |
| Filter 21-1/2" / 546 mm x | 16-3/8" / 417 mm | 19-7/8" / 505 mm | 19-7/8" / 505 mm | 23-5/16" / 592 mm | 23-5/16" / 592 mm |
| CABINET CONFIGURATION OPTIONS | | | | | |
| | 1-piece | 1-piece / Modular | 1-piece / Modular | Modular | Modular |

PERFORMANCE DATA

AIRFLOW DELIVERY — COOLING, HEATING, ELECTRIC HEATING MODES

The FE4 and FE5A fan coils will provide airflow at a rate that is requested by the Integrated System User Interface during air conditioning or heat pump heating (without electric heat) modes. The nominal airflow for both heating and cooling modes is 350 cfm/ton nominal size of the outdoor unit installed. The airflow actually requested by the User Interface is modified by its internal algorithms for zoning, comfort or efficiency concerns. Refer to the

documentation for the User Interface for more information on how the User Interface controls the fan coil. Safe operation of electric heaters requires airflow delivery at or above the minimum CFM for electric heater application listed in the chart below. The fan coil will adjust its airflow delivery to maintain safe airflow as operating mode and staging conditions require.

FE4A/FE5A FAN COIL AIRFLOW DELIVERY CHART (CFM) — ELECTRIC HEATING MODELS

| MODEL FE4A | OUTDOOR UNIT CAPACITY BTUH | ELECTRIC HEATER KW RANGE | | | | | | |
|------------|----------------------------|--------------------------|------|------|------|------|------|------|
| | | 5 | 9 | 10 | 15 | 20 | 24 | 30 |
| 002 | EMERGENCY | 625 | 625 | 675 | 775 | 950 | — | — |
| | 18,000 | 625 | 625 | 675 | — | — | — | — |
| | 24,000 | 650 | 725 | 775 | 900 | — | — | — |
| | 30,000 | 800 | 875 | 875 | 925 | 1125 | — | — |
| | 36,000 | 975 | 975 | 975 | 1025 | 1125 | — | — |
| 003 | EMERGENCY | 675 | 700 | 775 | 850 | 1050 | — | — |
| | 24,000 | 675 | 875 | 875 | 1100 | 1150 | — | — |
| | 30,000 | 800 | 875 | 875 | 1100 | 1150 | — | — |
| | 36,000 | 975 | 975 | 1025 | 1150 | 1250 | — | — |
| | 42,000 | 1125 | 1125 | 1125 | 1150 | 1350 | — | — |
| 005 | EMERGENCY | 675 | 700 | 775 | 850 | 1050 | 1400 | 1425 |
| | 30,000 | 800 | 875 | 875 | 1100 | 1150 | — | — |
| | 36,000 | 975 | 975 | 1025 | 1150 | 1250 | — | — |
| | 42,000 | 1125 | 1125 | 1125 | 1150 | 1250 | — | — |
| | 48,000 | 1305 | 1305 | 1305 | 1305 | 1350 | 1500 | 1600 |
| 006 | EMERGENCY | 1050 | 1050 | 1050 | 1050 | 1125 | 1750 | 1750 |
| | 36,000 | 1050 | 1050 | 1100 | 1350 | 1350 | — | — |
| | 42,000 | 1125 | 1125 | 1150 | 1350 | 1350 | — | — |
| | 48,000 | 1300 | 1300 | 1300 | 1350 | 1500 | 1750 | 1750 |
| | 60,000 | 1625 | 1625 | 1625 | 1625 | 1750 | 1750 | 1750 |
| MODEL FE5A | OUTDOOR UNIT CAPACITY BTUH | ELECTRIC HEATER KW RANGE | | | | | | |
| | | 5 | 9 | 10 | 15 | 20 | 24 | 30 |
| 004 | EMERGENCY | 675 | 775 | 775 | 900 | 1125 | — | — |
| | 24,000 | 975 | 975 | 975 | — | — | — | — |
| | 30,000 | 1050 | 1050 | 1100 | 1125 | — | — | — |
| | 36,000 | 1050 | 1050 | 1100 | 1350 | 1350 | — | — |
| | 42,000 | 1125 | 1125 | 1150 | 1350 | 1350 | — | — |

Note 1: Emergency – Air conditioner with electric heater application, or emergency heat.


Note 2: These airflows are minimum airflows as UL listed.

Note 3: Dashed entry indicates that the heater/fan coil/outdoor unit combination is not approved. Do not apply.

FE4A / FE5A

ACCEPTABLE DUCT CONDITIONS

FE4A / FE5A

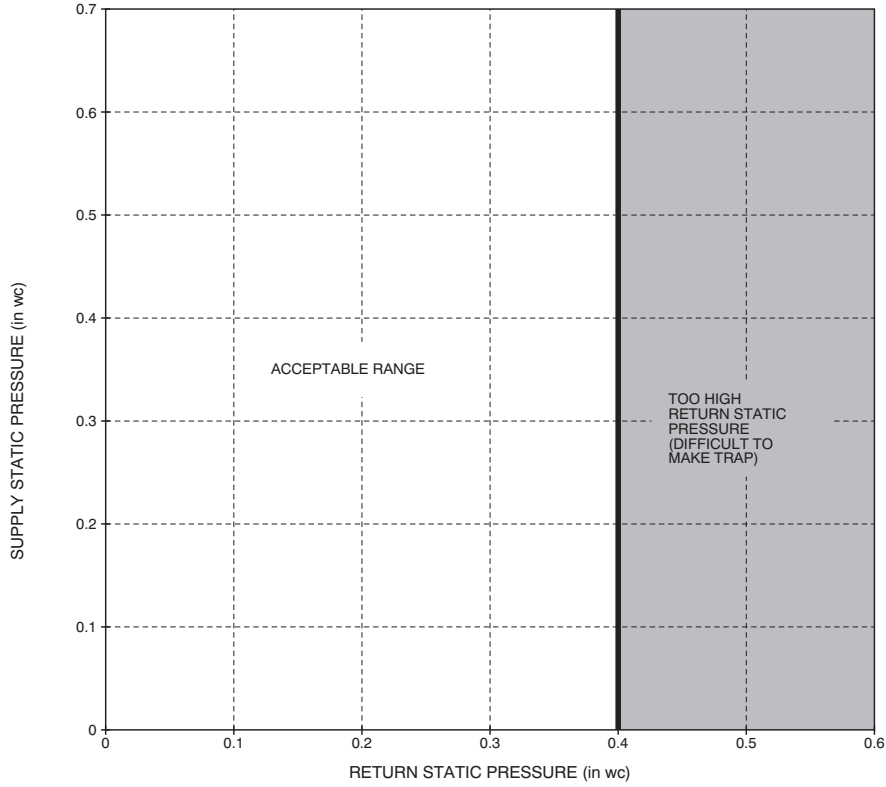

For satisfactory operation (specifically making dry secondary trap), subject fan coils must be installed with duct systems which fall within the "Acceptable Range" illustrated above.

A07273

MINIMUM RPM TABLE

| MODEL | SYSTEM SIZES | CFM RANGE | MIN RPM |
|---------------|--------------------|------------|---------|
| FE4ANF002 | 018, 024, 030, 036 | 150 – 1200 | 300 |
| FE4AN(B,F)003 | 024, 030, 036, 042 | 200 – 1400 | 285 |
| FE4AN(B,F)005 | 030, 036, 042, 048 | 250 – 1600 | 275 |
| FE4ANB006 | 036, 042, 048, 060 | 500 – 2000 | 275 |
| FE5ANB004 | 024, 030, 036, 042 | 500 – 1400 | 275 |

MAXIMUM STATIC TABLE

| MODEL | AIRFLOW DELIVERY | AVAILABLE STATIC PRESSURE |
|---------------|------------------|---------------------------|
| FE4ANF002 | 525 CFM | 1.00 in wc |
| | 700 CFM | 1.00 in wc |
| | 875 CFM | 1.00 in wc |
| | 1050 CFM | 0.80 in wc |
| | 1200 CFM | 0.60 in wc |
| FE4AN(B,F)003 | 700 CFM | 1.00 in wc |
| | 875 CFM | 1.00 in wc |
| | 1050 CFM | 1.00 in wc |
| | 1225 CFM | 1.00 in wc |
| | 1400 CFM | 0.80 in wc |
| FE4AN(B,F)005 | 875 CFM | 1.00 in wc |
| | 1050 CFM | 1.00 in wc |
| | 1225 CFM | 1.00 in wc |
| | 1400 CFM | 1.00 in wc |
| | 1600 CFM | 0.50 in wc |
| FE4ANB006 | 1050 CFM | 1.00 in wc |
| | 1225 CFM | 1.00 in wc |
| | 1400 CFM | 1.00 in wc |
| | 1750 CFM | 1.00 in wc |
| | 2000 CFM | 0.60 in wc |
| FE5ANB004 | 700 CFM | 1.00 in wc |
| | 875 CFM | 1.00 in wc |
| | 1050 CFM | 1.00 in wc |
| | 1225 CFM | 1.00 in wc |
| | 1400 CFM | 1.00 in wc |

GROSS COOLING CAPACITIES (MBTUH)

| INDOOR COIL AIR | | SATURATED TEMPERATURE LEAVING EVAPORATOR (°F / °C) | | | | | | | | | | | | | | |
|------------------|---------|--|-------|------|--------|-------|------|--------|-------|------|---------|-------|------|---------|-------|------|
| | | 35 / 2 | | | 40 / 4 | | | 45 / 7 | | | 50 / 10 | | | 55 / 13 | | |
| CFM | EWB | TC | SHC | BF | TC | SHC | BF | TC | SHC | BF | TC | SHC | BF | TC | SHC | BF |
| FE4ANF002 | | | | | | | | | | | | | | | | |
| 500 | 72 / 22 | 40.19 | 19.65 | 0.00 | 36.23 | 17.59 | 0.00 | 31.86 | 15.48 | 0.00 | 27.00 | 13.31 | 0.00 | 21.65 | 11.11 | 0.00 |
| | 67 / 19 | 32.99 | 19.92 | 0.01 | 28.96 | 17.79 | 0.01 | 24.52 | 15.62 | 0.01 | 19.64 | 13.40 | 0.01 | 14.28 | 11.17 | 0.01 |
| | 62 / 17 | 26.44 | 20.11 | 0.01 | 22.36 | 17.93 | 0.01 | 17.93 | 15.73 | 0.01 | 13.56 | 13.56 | 0.03 | 11.28 | 11.28 | 0.19 |
| 650 | 72 / 22 | 49.76 | 24.23 | 0.00 | 44.85 | 21.76 | 0.00 | 39.40 | 19.20 | 0.00 | 33.36 | 16.55 | 0.01 | 26.66 | 13.83 | 0.01 |
| | 67 / 19 | 40.90 | 24.80 | 0.01 | 35.90 | 22.22 | 0.01 | 30.37 | 19.55 | 0.02 | 24.27 | 16.82 | 0.02 | 17.58 | 14.06 | 0.02 |
| | 62 / 17 | 32.84 | 25.24 | 0.02 | 27.75 | 22.56 | 0.02 | 22.25 | 19.85 | 0.02 | 17.13 | 17.13 | 0.06 | 14.25 | 14.25 | 0.21 |
| 875 | 72 / 22 | 61.99 | 30.08 | 0.00 | 55.87 | 27.15 | 0.00 | 49.04 | 24.04 | 0.01 | 41.48 | 20.80 | 0.02 | 33.10 | 17.46 | 0.02 |
| | 67 / 19 | 51.08 | 31.23 | 0.03 | 44.83 | 28.09 | 0.03 | 37.91 | 24.84 | 0.03 | 30.23 | 21.47 | 0.03 | 21.83 | 18.03 | 0.03 |
| | 62 / 17 | 41.11 | 32.14 | 0.03 | 34.76 | 28.88 | 0.03 | 27.91 | 25.53 | 0.04 | 22.04 | 22.04 | 0.10 | 18.33 | 18.33 | 0.25 |
| 1000 | 72 / 22 | 67.83 | 32.91 | 0.00 | 61.10 | 29.76 | 0.00 | 53.66 | 26.40 | 0.02 | 45.36 | 22.89 | 0.03 | 36.17 | 19.27 | 0.03 |
| | 67 / 19 | 55.96 | 34.39 | 0.04 | 49.12 | 31.01 | 0.04 | 41.53 | 27.48 | 0.04 | 33.11 | 23.83 | 0.04 | 23.88 | 20.06 | 0.04 |
| | 62 / 17 | 45.09 | 35.62 | 0.04 | 38.13 | 32.08 | 0.04 | 30.69 | 28.43 | 0.05 | 24.54 | 24.54 | 0.12 | 20.40 | 20.40 | 0.27 |
| 1250 | 72 / 22 | 77.77 | 37.84 | 0.00 | 70.13 | 34.30 | 0.03 | 61.59 | 30.55 | 0.05 | 52.04 | 26.60 | 0.05 | 41.42 | 22.50 | 0.05 |
| | 67 / 19 | 64.36 | 40.02 | 0.06 | 56.52 | 36.24 | 0.06 | 47.77 | 32.27 | 0.06 | 38.04 | 28.12 | 0.06 | 27.46 | 23.81 | 0.07 |
| | 62 / 17 | 51.98 | 41.92 | 0.06 | 44.00 | 37.93 | 0.06 | 35.61 | 33.77 | 0.08 | 29.12 | 29.12 | 0.16 | 24.20 | 24.20 | 0.30 |
| FE4ANF003 | | | | | | | | | | | | | | | | |
| 600 | 72 / 22 | 43.01 | 20.98 | 0.00 | 38.69 | 18.78 | 0.00 | 33.92 | 16.51 | 0.00 | 28.64 | 14.18 | 0.00 | 22.85 | 11.81 | 0.01 |
| | 67 / 19 | 35.27 | 21.34 | 0.01 | 30.88 | 19.04 | 0.01 | 26.07 | 16.71 | 0.01 | 20.79 | 14.34 | 0.01 | 15.03 | 11.95 | 0.01 |
| | 62 / 17 | 28.24 | 21.59 | 0.01 | 23.81 | 19.25 | 0.01 | 19.05 | 16.90 | 0.02 | 14.56 | 14.56 | 0.05 | 12.11 | 12.11 | 0.21 |
| 800 | 72 / 22 | 53.83 | 26.15 | 0.00 | 48.40 | 23.49 | 0.00 | 42.36 | 20.71 | 0.00 | 35.72 | 17.83 | 0.02 | 28.38 | 14.89 | 0.02 |
| | 67 / 19 | 44.23 | 26.92 | 0.02 | 38.71 | 24.10 | 0.02 | 32.61 | 21.20 | 0.03 | 25.91 | 18.24 | 0.03 | 18.65 | 15.26 | 0.03 |
| | 62 / 17 | 35.47 | 27.49 | 0.03 | 29.87 | 24.58 | 0.03 | 23.89 | 21.65 | 0.03 | 18.67 | 18.67 | 0.09 | 15.51 | 15.51 | 0.24 |
| 1000 | 72 / 22 | 63.07 | 30.60 | 0.00 | 56.66 | 27.57 | 0.00 | 49.58 | 24.36 | 0.02 | 41.76 | 21.04 | 0.03 | 33.10 | 17.62 | 0.03 |
| | 67 / 19 | 51.91 | 31.82 | 0.04 | 45.41 | 28.58 | 0.04 | 38.24 | 25.24 | 0.04 | 30.31 | 21.78 | 0.04 | 21.76 | 18.29 | 0.05 |
| | 62 / 17 | 41.71 | 32.80 | 0.04 | 35.12 | 29.43 | 0.04 | 28.13 | 26.00 | 0.05 | 22.41 | 22.41 | 0.12 | 18.60 | 18.60 | 0.27 |
| 1200 | 72 / 22 | 71.01 | 34.48 | 0.00 | 63.77 | 31.12 | 0.02 | 55.79 | 27.57 | 0.04 | 46.95 | 23.88 | 0.05 | 37.18 | 20.08 | 0.05 |
| | 67 / 19 | 58.54 | 36.17 | 0.05 | 51.21 | 32.59 | 0.05 | 43.10 | 28.87 | 0.06 | 34.13 | 25.02 | 0.06 | 24.47 | 21.08 | 0.06 |
| | 62 / 17 | 47.12 | 37.60 | 0.06 | 39.70 | 33.86 | 0.06 | 31.89 | 30.00 | 0.07 | 25.83 | 25.83 | 0.15 | 21.43 | 21.43 | 0.29 |
| 1400 | 72 / 22 | 77.95 | 37.95 | 0.01 | 70.07 | 34.31 | 0.04 | 61.29 | 30.47 | 0.06 | 51.54 | 26.47 | 0.06 | 40.78 | 22.33 | 0.07 |
| | 67 / 19 | 64.44 | 40.15 | 0.07 | 56.37 | 36.28 | 0.07 | 47.43 | 32.24 | 0.07 | 37.54 | 28.04 | 0.07 | 26.89 | 23.69 | 0.08 |
| | 62 / 17 | 51.95 | 42.08 | 0.07 | 43.78 | 37.99 | 0.08 | 35.30 | 33.73 | 0.09 | 28.95 | 28.95 | 0.19 | 24.01 | 24.01 | 0.32 |
| FE5ANB004 | | | | | | | | | | | | | | | | |
| 600 | 72 / 22 | 40.42 | 19.84 | 0.00 | 36.59 | 17.80 | 0.00 | 32.35 | 15.70 | 0.00 | 27.64 | 13.54 | 0.00 | 22.39 | 11.33 | 0.00 |
| | 67 / 19 | 33.22 | 20.00 | 0.00 | 29.31 | 17.90 | 0.00 | 24.99 | 15.74 | 0.00 | 20.19 | 13.53 | 0.00 | 14.87 | 11.27 | 0.00 |
| | 62 / 17 | 26.67 | 20.11 | 0.00 | 22.69 | 17.95 | 0.00 | 18.31 | 15.75 | 0.00 | 13.60 | 13.54 | 0.00 | 11.29 | 11.29 | 0.17 |
| 800 | 72 / 22 | 52.07 | 25.46 | 0.00 | 47.19 | 22.92 | 0.00 | 41.75 | 20.28 | 0.00 | 35.66 | 17.53 | 0.00 | 28.84 | 14.70 | 0.00 |
| | 67 / 19 | 42.88 | 25.89 | 0.00 | 37.88 | 23.24 | 0.00 | 32.31 | 20.49 | 0.00 | 26.10 | 17.66 | 0.00 | 19.18 | 14.75 | 0.00 |
| | 62 / 17 | 34.51 | 26.21 | 0.00 | 29.39 | 23.46 | 0.00 | 23.73 | 20.64 | 0.00 | 17.81 | 17.81 | 0.01 | 14.85 | 14.85 | 0.18 |
| 1000 | 72 / 22 | 62.54 | 30.48 | 0.00 | 56.75 | 27.53 | 0.00 | 50.25 | 24.45 | 0.00 | 42.94 | 21.21 | 0.00 | 34.73 | 17.84 | 0.00 |
| | 67 / 19 | 51.63 | 31.28 | 0.00 | 45.66 | 28.17 | 0.01 | 38.98 | 24.93 | 0.01 | 31.49 | 21.55 | 0.01 | 23.12 | 18.06 | 0.01 |
| | 62 / 17 | 41.65 | 31.91 | 0.01 | 35.51 | 28.66 | 0.01 | 28.71 | 25.30 | 0.01 | 21.89 | 21.89 | 0.03 | 18.26 | 18.26 | 0.19 |
| 1200 | 72 / 22 | 71.89 | 34.94 | 0.00 | 65.33 | 31.70 | 0.00 | 57.89 | 28.24 | 0.00 | 49.50 | 24.59 | 0.00 | 40.06 | 20.76 | 0.00 |
| | 67 / 19 | 59.49 | 36.20 | 0.01 | 52.68 | 32.73 | 0.01 | 45.02 | 29.06 | 0.01 | 36.39 | 25.22 | 0.01 | 26.71 | 21.21 | 0.01 |
| | 62 / 17 | 48.10 | 37.22 | 0.01 | 41.07 | 33.55 | 0.01 | 33.27 | 29.72 | 0.01 | 25.77 | 25.77 | 0.05 | 21.51 | 21.51 | 0.20 |
| 1400 | 72 / 22 | 80.24 | 38.94 | 0.00 | 73.00 | 35.45 | 0.00 | 64.73 | 31.69 | 0.00 | 55.41 | 27.69 | 0.01 | 44.86 | 23.46 | 0.01 |
| | 67 / 19 | 66.53 | 40.71 | 0.01 | 58.99 | 36.93 | 0.01 | 50.47 | 32.91 | 0.02 | 40.84 | 28.66 | 0.02 | 29.98 | 24.20 | 0.02 |
| | 62 / 17 | 53.91 | 42.17 | 0.02 | 46.10 | 38.14 | 0.02 | 37.43 | 33.92 | 0.02 | 29.46 | 29.46 | 0.07 | 24.60 | 24.60 | 0.22 |
| FE4ANF005 | | | | | | | | | | | | | | | | |
| 750 | 72 / 22 | 57.24 | 28.01 | 0.00 | 51.64 | 25.08 | 0.00 | 45.46 | 22.08 | 0.00 | 38.59 | 19.00 | 0.00 | 30.99 | 15.85 | 0.00 |
| | 67 / 19 | 46.98 | 28.35 | 0.00 | 41.29 | 25.33 | 0.00 | 35.01 | 22.24 | 0.00 | 28.09 | 19.09 | 0.00 | 20.47 | 15.90 | 0.01 |
| | 62 / 17 | 37.67 | 28.59 | 0.01 | 31.89 | 25.50 | 0.01 | 25.61 | 22.37 | 0.01 | 19.28 | 19.28 | 0.02 | 16.05 | 16.05 | 0.19 |
| 950 | 72 / 22 | 69.68 | 33.97 | 0.00 | 62.89 | 30.52 | 0.00 | 55.32 | 26.92 | 0.00 | 46.89 | 23.21 | 0.00 | 37.57 | 19.40 | 0.00 |
| | 67 / 19 | 57.29 | 34.68 | 0.01 | 50.33 | 31.06 | 0.01 | 42.64 | 27.33 | 0.01 | 34.14 | 23.51 | 0.01 | 24.80 | 19.63 | 0.01 |
| | 62 / 17 | 45.99 | 35.21 | 0.01 | 38.92 | 31.47 | 0.01 | 31.24 | 27.68 | 0.01 | 23.90 | 23.90 | 0.04 | 19.89 | 19.89 | 0.20 |
| 1150 | 72 / 22 | 80.80 | 39.28 | 0.00 | 72.96 | 35.40 | 0.00 | 64.17 | 31.32 | 0.00 | 54.37 | 27.06 | 0.01 | 43.48 | 22.66 | 0.01 |
| | 67 / 19 | 66.56 | 40.46 | 0.02 | 58.50 | 36.34 | 0.02 | 49.54 | 32.05 | 0.02 | 39.60 | 27.64 | 0.02 | 28.70 | 23.15 | 0.02 |
| | 62 / 17 | 53.51 | 41.36 | 0.02 | 45.29 | 37.07 | 0.02 | 36.38 | 32.70 | 0.02 | 28.26 | 28.26 | 0.07 | 23.51 | 23.51 | 0.22 |
| 1500 | 72 / 22 | 97.47 | 47.29 | 0.00 | 88.05 | 42.83 | 0.00 | 77.49 | 38.05 | 0.01 | 65.68 | 33.04 | 0.02 | 52.41 | 27.78 | 0.02 |
| | 67 / 19 | 80.52 | 49.40 | 0.03 | 70.85 | 44.58 | 0.03 | 60.01 | 39.53 | 0.03 | 47.89 | 34.25 | 0.03 | 34.64 | 28.83 | 0.04 |
| | 62 / 17 | 64.96 | 51.12 | 0.03 | 55.02 | 46.04 | 0.03 | 44.30 | 40.80 | 0.04 | 35.27 | 35.27 | 0.10 | 29.34 | 29.34 | 0.25 |
| 1700 | 72 / 22 | 105.61 | 51.26 | 0.00 | 95.43 | 46.52 | 0.01 | 84.03 | 41.43 | 0.03 | 71.21 | 36.06 | 0.03 | 56.82 | 30.42 | 0.03 |
| | 67 / 19 | 87.38 | 53.92 | 0.04 | 76.93 | 48.80 | 0.04 | 65.20 | 43.40 | 0.04 | 52.01 | 37.70 | 0.04 | 37.60 | 31.83 | 0.05 |
| | 62 / 17 | 70.60 | 56.17 | 0.04 | 59.87 | 50.74 | 0.04 | 48.32 | 45.08 | 0.05 | 38.96 | 38.96 | 0.13 | 32.40 | 32.40 | 0.27 |
| FE4ANB006 | | | | | | | | | | | | | | | | |
| 1050 | 72 / 22 | 76.01 | 37.07 | 0.00 | 68.82 | 33.39 | 0.00 | 60.76 | 29.56 | 0.00 | 51.72 | 25.55 | 0.00 | 41.64 | 21.42 | 0.00 |
| | 67 / 19 | 62.63 | 37.91 | 0.01 | 55.22 | 34.04 | 0.01 | 46.97 | 30.03 | 0.01 | 37.78 | 25.89 | 0.01 | 27.60 | 21.64 | 0.01 |
| | 62 / 17 | 50.40 | 38.54 | 0.01 | 42.81 | 34.53 | 0.01 | 34.49 | 30.41 | 0.01 | 26.28 | 26.28 | 0.03 | 21.90 | 21.90 | 0.19 |
| 1300 | 72 / 22 | 89.66 | 43.58 | 0.00 | 81.26 | 39.43 | 0.00 | 71.77 | 35.02 | 0.00 | 61.13 | 30.39 | 0.00 | 49.17 | 25.55 | 0.01 |
| | 67 / 19 | 74.04 | 45.04 | 0.01 | 65.36 | 40.60 | 0.01 | 55.62 | 35.94 | 0.01 | 44.72 | | | | | |

FACTORY-INSTALLED FILTER STATIC PRESSURE DROP (in wc)

| MODEL | CFM | | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 400 | 600 | 800 | 1000 | 1200 | 1400 | 1600 | 1800 | 2000 |
| FE4A | 0.020 | 0.044 | 0.048 | 0.072 | 0.100 | — | — | — | — |
| 002 | 0.020 | 0.044 | 0.048 | 0.072 | 0.100 | — | — | — | — |
| 003 | — | 0.020 | 0.035 | 0.051 | 0.070 | 0.092 | — | — | — |
| 005 | — | — | 0.035 | 0.051 | 0.070 | 0.092 | 0.120 | — | — |
| 006 | — | — | — | 0.038 | 0.053 | 0.070 | 0.086 | 0.105 | 0.133 |
| MODEL | CFM | | | | | | | | |
| FE5A | 400 | 600 | 800 | 1000 | 1200 | 1400 | 1600 | 1800 | 2000 |
| 004 | — | 0.015 | 0.026 | 0.038 | 0.053 | 0.070 | — | — | — |

AIR DELIVERY PERFORMANCE CORRECTION COMPONENT PRESSURE DROP (in wc) AT INDICATED AIRFLOW (DRY TO WET COIL)

| MODEL | CFM | | | | | | | | | | |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 600 | 700 | 800 | 900 | 1000 | 1100 | 1200 | 1300 | 1400 | 1500 | 1600 |
| FE4A | 0.012 | 0.016 | 0.022 | 0.028 | 0.034 | 0.040 | 0.049 | — | — | — | — |
| 002 | 0.012 | 0.016 | 0.022 | 0.028 | 0.034 | 0.040 | 0.049 | — | — | — | — |
| 003 | — | 0.026 | 0.034 | 0.042 | 0.052 | 0.063 | 0.075 | 0.083 | 0.091 | 0.098 | 0.110 |
| 005 | — | 0.006 | 0.008 | 0.010 | 0.012 | 0.015 | 0.017 | 0.020 | 0.023 | 0.027 | 0.030 |
| | CFM | | | | | | | | | | |
| | 1100 | 1200 | 1300 | 1400 | 1500 | 1600 | 1700 | 1800 | 1900 | 2000 | 2100 |
| 006 | 0.013 | 0.016 | 0.018 | 0.020 | 0.023 | 0.027 | 0.030 | 0.034 | 0.039 | 0.044 | 0.048 |
| MODEL | CFM | | | | | | | | | | |
| FE5A | 600 | 700 | 800 | 900 | 1000 | 1100 | 1200 | 1300 | 1400 | 1500 | 1600 |
| 004 | 0.004 | 0.005 | 0.007 | 0.009 | 0.011 | 0.013 | 0.016 | 0.018 | 0.020 | 0.023 | — |

NOTE: Subtract the above pressure drop corrections from unit airflow data when that component or condition is used. The remaining external static pressure will be available for the duct system.

UNITS WITHOUT ELECTRIC HEAT

| UNIT SIZE | VOLTS-PHASE | FLA | MIN CKT AMPS | BRANCH CIRCUIT | |
|-----------|-------------|-----|--------------|--------------------|-------------------|
| | | | | Min Wire Size Awg* | Fuse/Ckt Bkr Amps |
| 002 | 208/230-1 | 4.3 | 5.4 | 14 | 15 |
| 003 | 208/230-1 | 4.3 | 5.4 | 14 | 15 |
| 005 | 208/230-1 | 4.3 | 5.4 | 14 | 15 |
| 004, 006 | 208/230-1 | 6.8 | 8.5 | 14 | 15 |

* Use copper wire only to connect unit. If other than uncoated (non-plated) 75°C ambient, copper wire (solid wire for 10 AWG and smaller, stranded wire for larger than 10 AWG) is used consult applicable tables of the National Electric Code (ANSI/NFPA 70).

NOTE: If branch circuit wire length exceeds 100 ft / 30.5 m, consult NEC 210-19a to determine maximum wire length. Use 2% voltage drop.

FLA — Full Load Amps

ACCESSORY ELECTRIC HEATERS

| HEATER PART NO. | kW @ 240V | VOLTS/PHASE | STAGES (kW OPERATING) | INTERNAL CIRCUIT PROTECTION | FAN COIL SIZE USED WITH | HEATING CAP. @ 230V‡ | INTELLIGENT HEAT CAPABLE (kW OPERATING) |
|-----------------|-----------|-------------|-----------------------|-----------------------------|-------------------------|----------------------|---|
| KFCEH0501N05 | 5 | 230/1 | 5 | None | All | 15,700 | — |
| KFCEH0901N10 | 10 | 230/1 | 10 | None | All | 31,400 | — |
| KFCEH3001F15 | 15 | 230/1 | 5, 15 | Fuses** | All | 47,100 | 5, 10, 15 |
| KFCEH3201F20 | 20 | 230/1 | 5, 20 | Fuses** | All | 62,800 | 5, 10, 15, 20 |
| KFCEH2901N09 | 9 | 230/1* | 3, 9 | None | All | 28,300 | 3, 6, 9 |
| KFCEH1601315 | 15 | 230/3 | 5, 15 | None | All | 47,100 | — |
| KFCEH3401F24 | 24 | 230/3† | 8, 16, 24 | Fuses | 005, 006 | 78,500 | 8, 16, 24 |
| KFCEH3501F30 | 30 | 230/3† | 10, 20, 30 | Fuses | 005, 006 | 94,200 | 10, 20, 30 |
| KFCEH2401C05 | 5 | 230/1 | 5 | Ckt Bkr | All | 15,700 | — |
| KFCEH2601C10 | 10 | 230/1 | 10 | Ckt Bkr | All | 31,400 | — |
| KFCEH3101C15 | 15 | 230/1 | 5, 15 | Ckt Bkr | All | 47,100 | 5, 10, 15 |
| KFCEH3301C20 | 20 | 230/1 | 5, 20 | Ckt Bkr | All | 62,800 | 5, 10, 15, 20 |

* Field convertible to 3 phase.

† These heaters field convertible to single phase.

** Single point wiring kit required for these heaters in Canada.

‡ Blower motor heat not included.

ELECTRIC HEATER INTERNAL PROTECTION

| HEATER kW | PHASE | FUSES QTY / SIZE | CKT BKR QTY / SIZE* |
|-----------|-------|------------------|---------------------|
| 5 | 1 | — | 1/60 |
| 8 | 1 | — | 1/60 |
| 9 | 1/3 | — | — |
| 10 | 1 | — | 1/60 |
| 15 | 1 | 2/30, 2/60 | 2/60 |
| 15 | 3 | — | — |
| 18 | 3 | — | — |
| 20 | 1 | 4/60 | 2/60 |
| 24 | 3/1 | 6/60 | — |
| 30 | 3/1 | 6/60 | — |

* All circuit breakers are 2 pole.

FE4A / FE5A

ACCESSORY ELECTRIC HEATER ELECTRICAL DATA

| HEATER PART NO. | kW | | P H A S E | INTERNAL CIRCUIT PROTEC- TION | HEATER AMPS 208/230V | | | Min Ampacity 208/230V** | | | Min Wire Size (AWG) 208/230V†† | | | Min Gnd Wire Size 208/230V | | | Max Fuse/CKT Bkr Amps 208/230V | | | Max Wire Length 208/230V (ft)‡‡ | | |
|-----------------|------|------|-----------------------|--|-------------------------|--------------|-----------|----------------------------|--------------|-----------|-----------------------------------|--------------|-------|-------------------------------|--------------|-------|-----------------------------------|--------------|-------|------------------------------------|--------------|-------|
| | 240v | 208v | | | Single Circuit | Dual Circuit | | Single Circuit | Dual Circuit | | Single Circuit | Dual Circuit | | Single Circuit | Dual Circuit | | Single Circuit | Dual Circuit | | Single Circuit | Dual Circuit | |
| | | | | | | L1,L2 | L3,L4 | | L1,L2 | L3,L4 | | L1,L2 | L3,L4 | | L1,L2 | L3,L4 | | L1,L2 | L3,L4 | | L1,L2 | L3,L4 |
| KFCEH0401N03 | 3 | 2.3 | 1 | None | 10.9/12.0 | — | — | 15.9/17.3 | — | — | 12/12 | — | — | 20/20 | — | — | 67/68 | — | — | — | — | |
| KFCEH0501N05† | 5 | 3.8 | 1 | None | 18.1/20.0 | — | — | 26.0/28.4 | — | — | 10/10 | — | — | 30/30 | — | — | 66/66 | — | — | — | — | |
| KFCEH0501N05‡ | 5 | 3.8 | 1 | None | 18.1/20.0 | — | — | 31.2/33.5 | — | — | 8/8 | — | — | 35/35 | — | — | 85/88 | — | — | — | — | |
| KFCEH2401C08† | 5 | 3.8 | 1 | CKT Bkr | 18.1/20.0 | — | — | 26.0/28.4 | — | — | 10/10 | — | — | 30/30 | — | — | 66/66 | — | — | — | — | |
| KFCEH2401C05‡ | 5 | 3.8 | 1 | CKT Bkr | 18.1/20.0 | — | — | 31.2/33.5 | — | — | 10/10 | — | — | 35/35 | — | — | 85/88 | — | — | — | — | |
| KFCEH0801N08 | 8 | 6.0 | 1 | None | 28.9/32.0 | — | — | 44.7/48.5 | — | — | 8/8 | — | — | 45/50 | — | — | 59/60 | — | — | — | — | |
| KFCEH2501C08 | 8 | 6.0 | 1 | CKT Bkr | 28.9/32.0 | — | — | 44.7/48.5 | — | — | 8/8 | — | — | 45/50 | — | — | 59/60 | — | — | — | — | |
| KFCEH2901N09* | 9 | 6.8 | 1 | None | 32.8/36.0 | — | — | 48.5/53.5 | — | — | 8/6 | — | — | 50/60 | — | — | 54/67 | — | — | — | — | |
| KFCEH2901N09†‡ | 9 | 6.8 | 3 | None | 18.9/20.8 | — | — | 32.0/34.5 | — | — | 8/8 | — | — | 35/35 | — | — | 83/85 | — | — | — | — | |
| KFCEH0901N10 | 10 | 7.5 | 1 | None | 36.2/40.0 | — | — | 53.8/58.5 | — | — | 6/6 | — | — | 60/60 | — | — | 78/80 | — | — | — | — | |
| KFCEH2601C10 | 10 | 7.5 | 1 | CKT Bkr | 36.2/40.0 | — | — | 53.8/58.5 | — | — | 6/6 | — | — | 60/60 | — | — | 78/80 | — | — | — | — | |
| KFCEH3001F15* | 15 | 11.3 | 1 | Fuse | 54.2/59.9 | 36.2/40.0 | 18.1/20.0 | 76.3/83.4 | 53.8/58.5 | 22.7/25.0 | 4/4 | 6/6 | 10/10 | 8/8 | 10/10 | 60/60 | 25/25 | 86/89 | 78/80 | 75/76 | — | |
| KFCEH5101C15* | 15 | 11.3 | 1 | CKT Bkr | — | 36.2/40.0 | 18.1/20.0 | — | 53.8/58.5 | 22.7/25.0 | — | 6/6 | 10/10 | — | 10/10 | — | 60/60 | 25/25 | — | 78/80 | 75/76 | |
| KFCEH1601315 | 15 | 11.3 | 3 | None | 31.3/34.6 | — | — | 47.7/51.8 | — | — | 8/6 | — | — | 50/60 | — | — | 59/60 | — | — | — | — | |
| KFCEH2001318 | 18 | 13.5 | 3 | None | 37.6/41.5 | — | — | 55.5/60.4 | — | — | 8/6 | — | — | 60/70 | — | — | 76/77 | — | — | — | — | |
| KFCEH3201F20* | 20 | 15.0 | 1 | Fuse | 72.3/79.9 | 36.2/40.0 | 36.2/40.0 | 96.9/106.4 | 53.8/58.5 | 45.3/50.0 | 3/2 | 6/6 | 8/8 | 10/10 | 10/10 | 60/60 | 50/50 | 85/109 | 78/80 | 59/59 | — | |
| KFCEH3301C20* | 20 | 15.0 | 1 | CKT Bkr | — | 36.2/40.0 | 36.2/40.0 | — | 53.8/58.5 | 45.3/50.0 | — | 6/6 | 8/8 | — | 10/10 | — | 60/60 | 50/50 | — | 78/80 | 59/59 | |
| KFCEH3401F24†† | 24 | 18.0 | 3 | Fuse | 50.1/55.4 | — | — | 71.2/77.8 | — | — | 4/4 | — | — | 80/80 | — | — | 94/95 | — | — | — | — | |
| KFCEH3401F24†† | 24 | 18.0 | 1 | Fuse | 86.7/95.5 | — | — | 116.9/127.9 | — | — | 1/1 | — | — | 125/150 | — | — | 115/116 | — | — | — | — | |
| KFCEH3501F30†† | 30 | 22.5 | 3 | Fuse | 82.6/89.2 | — | — | 86.8/95.0 | — | — | 3/3 | — | — | 90/100 | — | — | 97/88 | — | — | — | — | |
| KFCEH3501F30†† | 30 | 22.5 | 1 | Fuse | 109.0/120.0 | — | — | 144.8/158.5 | — | — | 0/00 | — | — | 150/175 | — | — | 117/150 | — | — | — | — | |

FIELD MULTIPOINT WIRING OF 24-AND 30-KW SINGLE PHASE

| HEATER PART NO. | kW | | P H A S E | HEATER AMPS 208/230V | | | MIN AMPACITY 208/230V** | | | MIN WIRE SIZE (AWG) 208/230V†† | | | MIN GND WIRES SIZE 208/230V | | | MAX FUSE/CKT BKR AMPS 208/230V | | | MAX WIRE LENGTH 208/230V (FT)‡‡ | | |
|-----------------|------|------|-----------------------|-------------------------|-----------|-----------|----------------------------|-----------|-----------|-----------------------------------|-------|-------|-----------------------------------|-------|-------|--------------------------------------|-------|-------|------------------------------------|-------|-------|
| | 240V | 208V | | L1,L2 | L3,L4 | L5,L6 | L1,L2 | L3,L4 | L5,L6 | L1,L2 | L3,L4 | L5,L6 | L1,L2 | L3,L4 | L5,L6 | L1,L2 | L3,L4 | L5,L6 | L1,L2 | L3,L4 | L5,L6 |
| | | | | | | | | | | | | | | | | | | | | | |
| KFCEH3401F24†† | 24 | 18.0 | 1 | 28.9/32.0 | 28.9/32.0 | 28.9/32.0 | 44.7/48.5 | 36.2/40.0 | 36.2/40.0 | 8/8 | 8/8 | 8/8 | 10/10 | 10/10 | 45/50 | 40/40 | 40/40 | 59/60 | 73/73 | 73/73 | 59/59 |
| KFCEH3501F30†† | 30 | 22.5 | 1 | 36.2/40.0 | 36.2/40.0 | 36.2/40.0 | 53.8/58.5 | 45.3/50.0 | 45.3/50.0 | 6/6 | 8/8 | 8/8 | 10/10 | 10/10 | 60/60 | 50/50 | 50/50 | 78/80 | 59/59 | 59/59 | 59/59 |

* Heaters are Intelligent Heat capable when used with the FE fan coil and Comfort Zone II™ or Infinity Control™.

† Field convertible to 1 phase, single or multiple supply circuit.

†† Field convertible to 3 phase.

** Includes blower motor amps of largest fan coil used with heater.

‡‡ Copper wire must be used. If other than uncoated (non-plated), 75°C ambient, copper wire (solid wire for 10 AWG and smaller, stranded wire for larger than 10 AWG) is used, consult applicable tables of the National Electric Code (ANSI/NFPA 70).

‡‡ Length shown is as measured 1 way along wire path between unit and service panel for a voltage drop not to exceed 2%.

NOTES:

1. For fan coil sizes 001 – 003.
2. For fan coil sizes 004 – 006.
3. Single circuit application of F15 and F20 heaters requires single-point wiring kit accessory.

SMARTSOURCE™ HYDRONIC ACCESSORY COILS

| MODEL | HEATING CAP. (BTU) | NO. OF ROWS | FLOW RATE (GPM) | HEIGHT | WIDTH | DEPTH | FAN COIL SIZE USED WITH |
|---------------|--------------------|-------------|-----------------|--------------|--------------|--------------|-------------------------|
| HC2AXX017050 | 50,000 | 2 | 3.0 – 6.0 | 18" / 457 mm | 18" / 457 mm | 18" / 457 mm | 002 |
| HC3AXX017065 | 65,000 | 3 | | | | | |
| HC2AXX021070 | 70,000 | 2 | 5.0 – 8.0 | 18" / 457 mm | 18" / 457 mm | 22" / 559 mm | 003, 005 |
| HC3AXX021090 | 90,000 | 3 | | | | | |
| HC2AXX024080 | 80,000 | 2 | | 18" / 457 mm | 18" / 457 mm | 26" / 660 mm | 004, 006 |
| HC3AXX024100 | 100,000 | 3 | | | | | |
| KFAIF0101HWC* | NA | NA | NA | NA | NA | NA | ALL (required) |

* Relay Interface Kit – Hydronic Kit This kit provides identification of the auxiliary or primary heating device as a boiler or hot water coil and relay to operate the boiler or hot water coil. SUGGESTED USE: All fan coils installed with SmartSource™ Hydronic coils.

REQUIRED ACCESSORY

| ITEM | ACCESSORY PART NO.* | FAN COIL SIZE USED WITH |
|------|--------------------------|-------------------------|
| 1. | Infinity™ User Interface | SYSTXCCUID01 – B |
| | or | |
| | Infinity™ Zone Control | SYSTXCCUIZ01 – B |

ADDITIONAL ACCESSORIES

| ITEM | ACCESSORY PART NO.* | FAN COIL SIZE USED WITH |
|------|---|-------------------------|
| 2. | Infinity™ 4 Zone Board | SYSTXCC4ZC01 |
| 3. | Infinity™ Smart Sensor | SYSTXCCSMS01 |
| 4. | Infinity™ System Access Module | SYSTXCCSAM01 |
| 5. | Infinity™ Network Interface Module | SYSTXCCNIM01 |
| 6. | Disconnect Kit | KFADK0201DSC |
| 7. | Downflow Base Kit | KFACB0201CFB |
| | | KFACB0301CFB |
| | | KFACB0401CFB |
| 8. | Downflow Conversion Kit | KFADC0201SLP |
| | | KFADC0401ACL |
| 9. | Single-Point Wiring Kit | KFASP0101SPK |
| 10. | Filter Kit (12 Pack) | KFAFK0212MED |
| | | KFAFK0312LRG |
| | | KFAFK0412XXL |
| 11. | Filter Media Cabinet | FNCCABCC0017 |
| | | FNCCABCC0021 |
| | | FNCCABCC0024 |
| 12. | Media Filter Cartridges | FILCCFNC0017 |
| | | FILCCFNC0021 |
| | | FILCCFNC0024 |
| 13. | Infinity™ Air Purifier | GAPABXCC1620 |
| | | GAPABXCC2020 |
| | | GAPABXCC2024 |
| 14. | PVC Condensate Trap Kit (50 pack) | KFAET0150ETK |
| 15. | Air Cleaner 240-volt Conversion Kit | KEAVC0201240 |
| 16. | Downflow/Horizontal Conversion Gasket Kit | KFAHD0101SLP |
| 17. | Airflow Sensor Kit (Air Cleaner) | KEAAC0101AAA |
| 18. | Horizontal Water Management Kit (25 pack) | KFAHC0125AAA |

* Factory authorized and listed, field installed.

Accessory Kits Description Suggested and Required Use

1. Infinity™ User Interface

Deluxe 7-Day Programmable wall-mounted system control.

REQUIRED USE: For all single-zone systems.

or

Infinity™ Zone Control

Deluxe Zoning 7-Day Programmable wall-mounted control.

REQUIRED USE: For all multi-zone systems.

2. Infinity™ 4 Zone Board

4-Zone Damper Control Module wall-mounted control.

REQUIRED USE: For all four-zone systems. For systems with 5 to 8 zones, a second Damper Control Module is required.

3. Infinity™ Smart Sensor

Wall control used to monitor temperature and/or fan control.

SUGGESTED USE: For use in zone systems.

FE4A / FE5A

- 4. Infinity™ System Access Module**
Hardware for wireless access and control via phone or internet.
SUGGESTED USE: For all systems where remote access is desired.
- 5. Infinity™ Network Interface Module**
Connects Heat Recovery and Energy Recovery Ventilators on non-zoning applications and non-communicating 2-speed units.
REQUIRED USE: For non-zoned systems installed with HRV or ERV, Hybrid Heat with non-communicating heatpumps or non-communicating 2-speed units (38TDB/YDB).
- 6. Disconnect Kit**
The kit is used to disconnect electrical power to the fan coil so service or maintenance may be performed safely.
SUGGESTED USE: Units for 3- through 10-kW electric resistance heaters and cooling controls.
- 7. Downflow Base Kit**
This kit is designed to provide a 1-in. minimum clearance between unit discharge plenum, ductwork, and combustible materials. It also provides a gap-free seal with the floor.
REQUIRED USE: This kit must be used whenever fan coils are used in downflow applications.
- 8. Downflow Conversion Kit**
Fan coils are shipped from the factory for upflow or horizontal-left applications. Downflow conversion kits provide proper condensate water drainage and support for the coil when used in downflow applications. Separate kits are available for slope coils and A-coils.
REQUIRED USE: This kit must be used whenever fan coils are used in downflow applications.
- 9. Single Point Wiring Kit**
The single point wiring kit acts as a jumper between L1 and L3 lugs, and between the L2 and L4 lugs. This allows the installer to run 2 heavy-gauge, high-voltage wires into the fan coil rather than 4 light-gauge, high-voltage wires.
SUGGESTED USE: Fan coils with 15- and 20-kW fused heaters only.
- 10. Filter Kit (12 pack)**
The kit consists of 12 fan coil framed filters. These filters collect large dust particles from the return air entering the fan coil and prevents them from collecting on the coil. This process helps to keep the coil clean, which increases heat transfer and, in turn, the efficiency of the system.
SUGGESTED USE: To replace filters in fan coils.
REQUIRED USE: All units unless a filter grille is used.
- 11. Filter Media Cabinet**
This cabinet is mounted to the fan coil on the return air end and designed to slip over the outer fan coil casing. The cabinets are insulated using the same insulation as production fan coils. They are designed for the removal of particulates from indoor air using FILCCFNC00(14, 17, 21, 24) media filter cartridges.
SUGGESTED USE: All fan coils.
- 12. Media Filter Cartridges**
These fan coil media filter cartridge kits are designed for the removal of particles from indoor air. The cartridge is installed in the return air duct next to the air handler or further upstream.
SUGGESTED USE: All fan coils.
- 13. Infinity™ Air Purifier**
The Infinity Air Purifier wires directly to fan coil and requires no duct transitions with Carrier units. It comes with an airflow sensor.
SUGGESTED USE: All fan coils.
- 14. Condensate Drain Trap Kit**
This kit consists of 50 PVC condensate traps. Each trap is pre-formed and ready for field installation. This deep trap helps the system make and hold proper condensate flow even during blower initiation.
SUGGESTED USE: All fan coils.
- 15. Air Cleaner 240-volt Conversion Kit**
The AIRA electronic air cleaner comes ready for 115-v operation.
REQUIRED USE: This kit is required when running 240-volt circuit to air cleaner.
- 16. Downflow/Horizontal Conversion Gasket Kit**
This kit provides the proper gasketing of units when applied in either a downflow or horizontal application.
REQUIRED USE: Fan coils in either downflow or horizontal applications.
- 17. Airflow Sensor Kit (Air Cleaner)**
The AIRA electronic air cleaner comes ready for 115-v operation
REQUIRED USE: This kit is required whenever an electronic air cleaner is used.
- 18. Horizontal Water Management Kit**
This kit provides proper installation of fan coils under conditions of high static pressure and high relative humidity.
SUGGESTED USE: All fan coils (except FE5 and FF1).