NOTE

(1) DIMENSIONS (L), (W), (H), ARE FOR STANDARD MACHINE.
THE DIMENSIONS ARE CHANGED BY PARTS ADDED.

(2) ⊕ INDICATES THE POSITION OF ANCHOR BOLTS.

(3) CLEARANCE SPACE MUST BE SAVED EITHER SIDE OF THE CHILLER

(4) ALL EXTERNAL WATER PIPING ARE TO BE PROVIDED
WITH WELDED ANSI 150LB FLANGES BY THE CUSTOMER.

(5) ⇑ INDICATES THE POSITION OF THE POWER SUPPLY
CONNECTION ON CONTROL PANEL. (DIA. 1-3/8 INCH)

(6) INSTALLATION CLEARANCE
·LONGITUDINAL DISTANCE:40 INCH
·TOP :8 INCH
·OTHERS:20 INCH

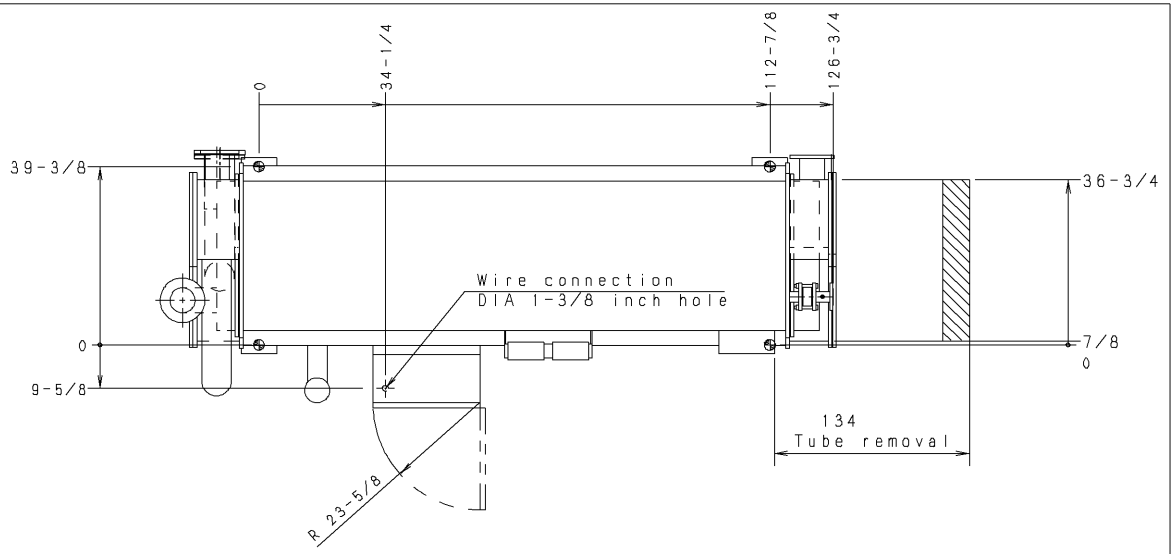

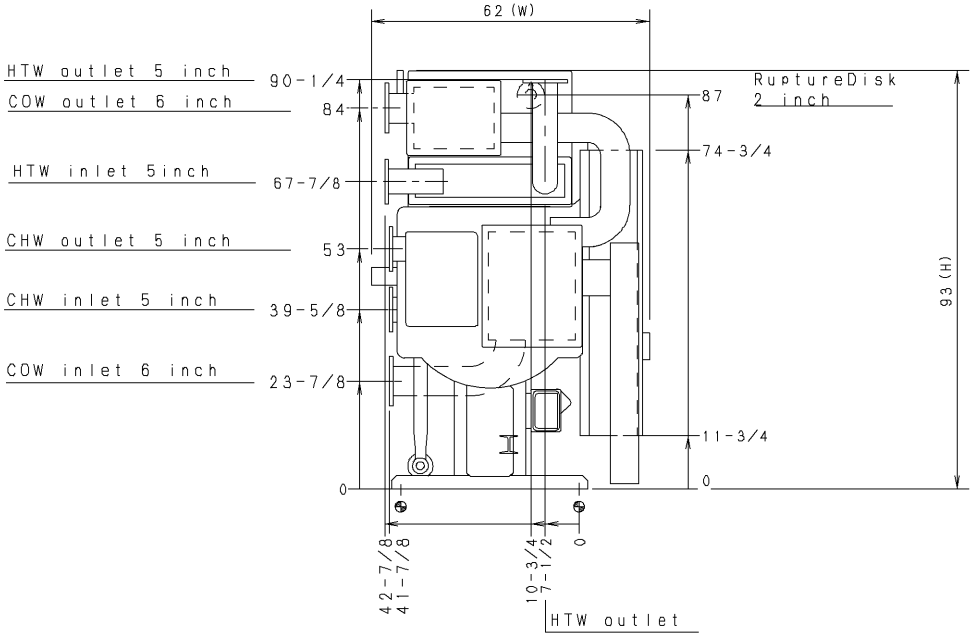

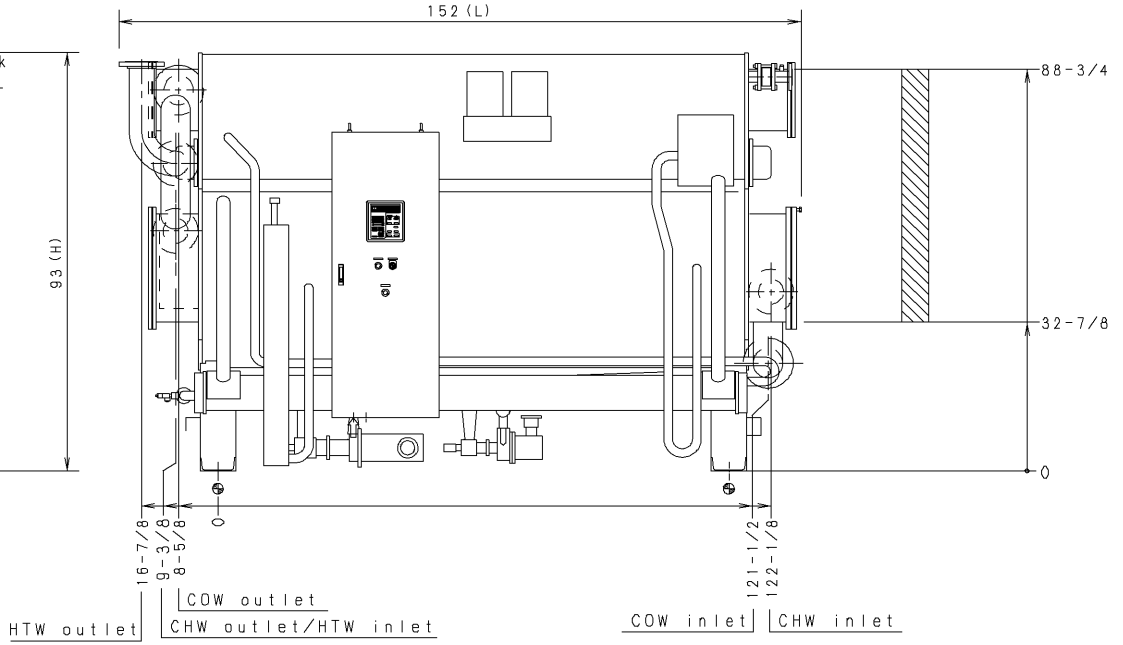

E3 A3 C2 G4

Carrier
SANYO

DIMENSIONS

TSA-16LJ-22

LJ-006-506-00-4